

## IPC/PTZ/NVR upgrade on web 6

Tiandy Technical Support Team 23/08/2020

### Description


IPC/PTZ/NVR upgrade on web6

### Prerequisites

- Already got FW

### Set up steps

1. Choose English here then enter the user name/password and login.

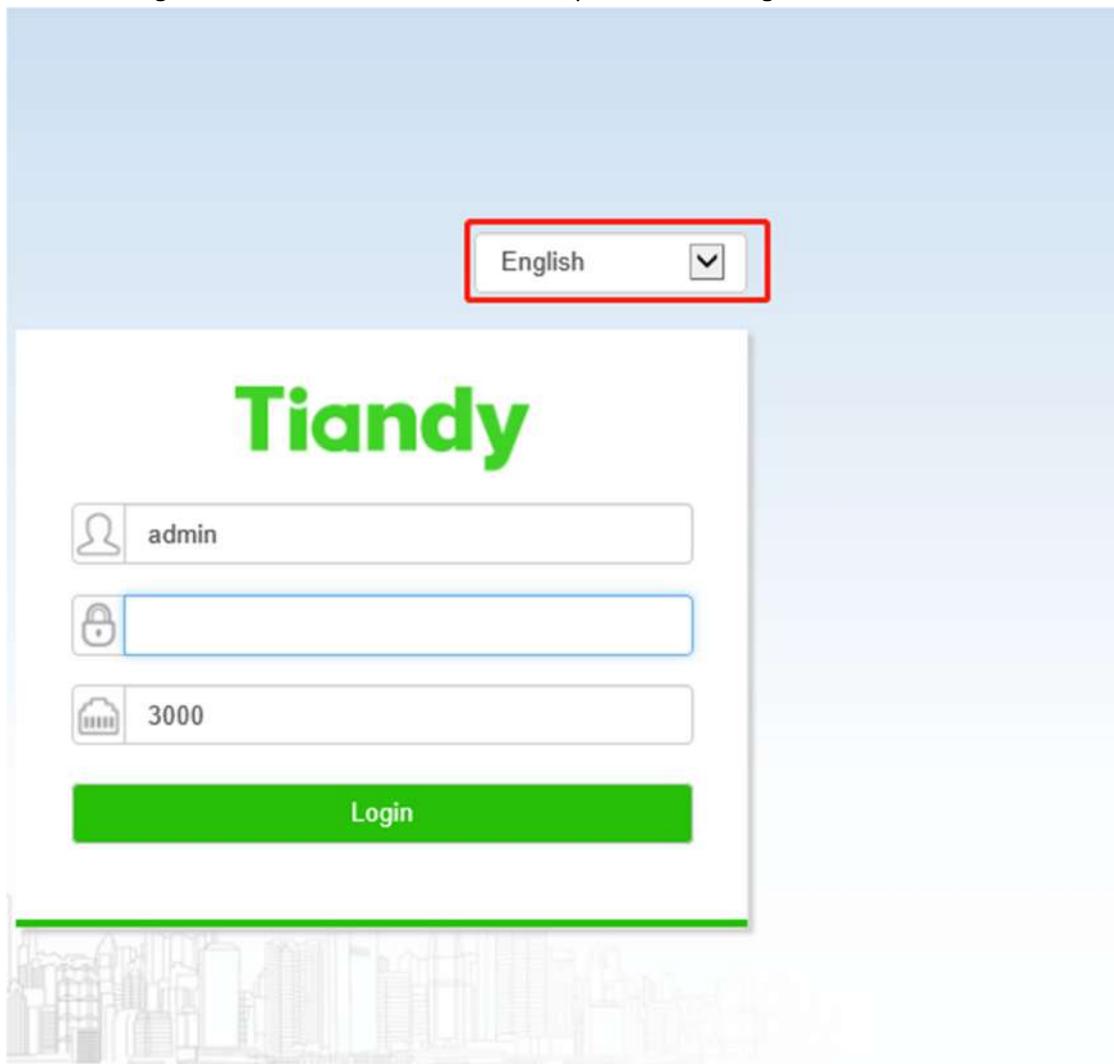

2. Select 'Configuration'.

The screenshot shows the Tiandy web interface with the 'Configuration' menu highlighted. The left sidebar contains a tree view with 'Basic Set' selected. The main content area is titled 'Network' and includes the following sections:

- Network:**
  - DHCP
  - IPv4 Address: 10.30.10.8
  - IPv4 Subnet Mask: 255.255.255.0
  - Gateway: 10.30.10.1
  - HTTP Port: 80
  - RTSP Port: 554
- Time:**
  - Region: (GMT+08:00)Beijing, Urumchi, Singa
  - Local Time: 2020-08-23 16:27:14
  - NTP Server: time.windows.com
  - Port: 123
  - Time Interval(minute): 60
- Users:**

No.	User Name	Authority	Edit	Remove
1	Admin	Admin	<a href="#">Edit</a>	
2	user1	Browse	<a href="#">Edit</a>	<a href="#">Remove</a>

Buttons at the bottom include Save, Cancel, Import, and Export.

3. Choose 'System'-'Maintenance'-'Upgrade'.

The screenshot shows the Tiandy web interface with the 'Maintenance' menu highlighted. The left sidebar contains a tree view with 'Maintenance' selected. The main content area is titled 'Maintenance' and includes the following sections:

- Version Information:**
  - Factory ID ID0000801940330170170341
  - Serial Number
  - MAC 00:50:c2:21:11:11
  - Hardware Version 1015
  - Kernel Version NVSS\_V14.0.6.20180928\_SP1
  - Web Version 6.1.18.731
  - cgi Version CGI\_V3.0.0.20180725
  - onvif Version ONVIF\_V3.1.0.20190131
  - p2p Version P2P\_V3.1.0.20180709
  - rtmp Version RTMP\_V3.1.0.20180709
  - rtsp Version RTSP\_V3.1.0.20190131
  - app Version APP\_V3.1.0.20180709
- Firmware Upgrade:**
  - Upgrade File (\*.box, \*.bin)
  - 
  -

4. Click 'Browse' to choose the upgrade box we send you.

**Tiandy**   Live View   Playback   Log   **Configuration**   EW

Basic Set   **Maintaince**   Upgrade

Audio Video Set

Network

Event Schedule

VCA

Storage

System

System

Users

**Maintaince**

Local PC Setting

**Version Information**

Factory ID ID0000801940330170170341

Serial Number

MAC 00:50:c2:21:11:11

Hardware Version 1015

Kernel Version NVSS\_V14.0.6.20180928\_SP1

Web Version 6.1.18.731

cgi Version CGI\_V3.0.0.20180725

onvif Version ONVIF\_V3.1.0.20190131

p2p Version P2P\_V3.1.0.20180709

rtmp Version RTMP\_V3.1.0.20180709

rtsp Version RTSP\_V3.1.0.20190131

app Version APP\_V3.1.0.20180709

**Firmware Upgrade**

Upgrade File

(\* .box,\*.bin)

©Tiandy Co.,Ltd All Rights Reserved

5.Click 'Upgrade' to finish S3E/S6 upgrade on web6. Do not turn off the power during upgrading.