



24/7
Support

6Year
Warranty



canadasecurity.com





CASE
CANADA SECURITY

Start Strong, Stay Secure

Table of Contents

About us 3

Technology Highlights 5

Domes 7

Turrets 16

Bullets 29

Speed Domes 39

Special Cameras 48

NVRs 55

Accessories 66

Information 74

Software 77



About us

Canada Security stands as a leading provider of surveillance equipment, backed by over 30 years of industry experience. Our extensive product range incorporates the latest technologies to address modern security challenges.


Our CASE team, which includes knowledgeable sales representatives and technical consultants across the US and Canada, is committed to meeting your regional needs. We provide thorough support, from product selection to installation guidance and troubleshooting.

With a 6-year warranty on cameras and NVRs, we demonstrate our commitment to quality. Additionally, our systems comply fully with NDAA regulations, ensuring top-tier security standards.

ABOUT US



TECHNOLOGY HIGHLIGHTS

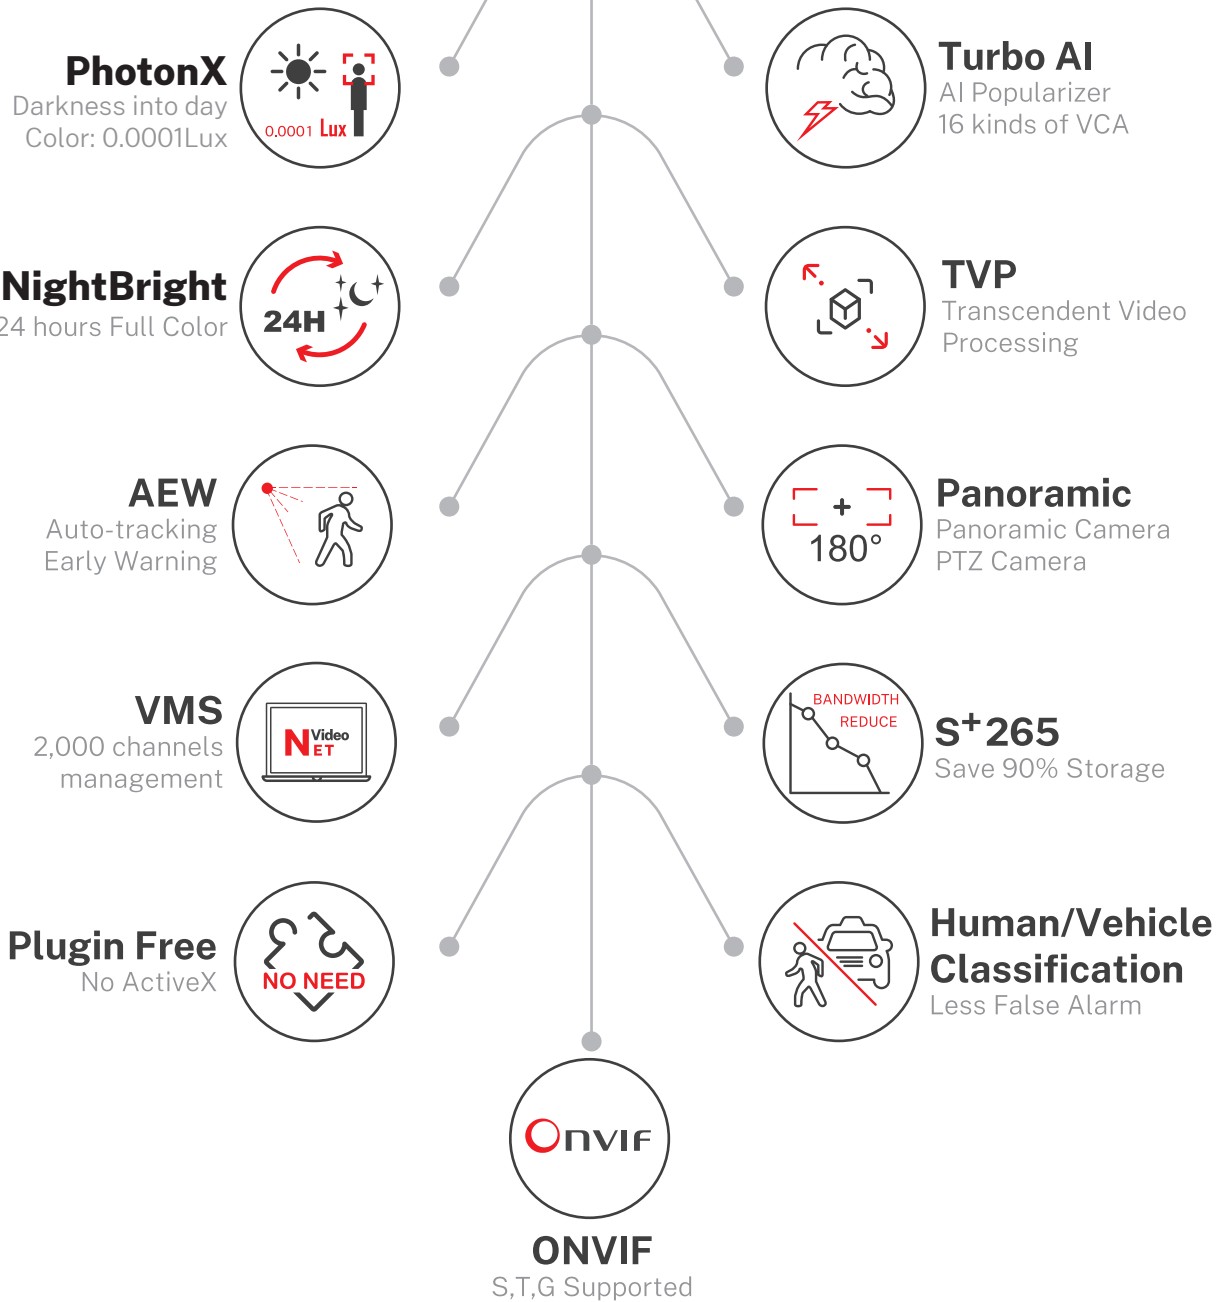





Domes





6 YEAR
WARRANTY

Image Sensor	4MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP66, IK10
Max. Resolution & Frame Rate	2560×1440 @ 25fps
Wide Dynamic Range	Digital WDR
Housing	Metal+Plastic
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264
Operating Conditions	-30°C~60°C, 0~95% RH
AI	Tripwire, Perimeter, Motion Detection

CS-14KS L-2.8mm

Value Series

Sharp Series

Intelligent Series



6 YEAR
WARRANTY

Image Sensor	5MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP67, IK10
Max. Resolution & Frame Rate	2592×1944 @ 20fps
Wide Dynamic Range	120dB
Housing	Metal+Plastic
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264
Operating Conditions	-40°C to 60°C, 0-95% RH
AI	Tripwire, Perimeter, Motion Detection

Value Series

Sharp Series

Intelligent Series

CS-15KS L-2.8mm



6YEAR
WARRANTY

Image Sensor	8MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.003 Lux
White Light Distance	N/A
Protection	IP66, IK10
Max. Resolution & Frame Rate	3840×2160 @ 20fps
Wide Dynamic Range	120dB
Housing	Metal+Plastic
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264
Operating Conditions	-40°C~65°C, 0~95% RH
AI	Tripwire, Perimeter, Motion Detection

Value Series

Sharp Series

Intelligent Series

CS-18KS L-2.8mm



6YEAR
WARRANTY

Image Sensor	8MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP67, IK10
Max. Resolution & Frame Rate	3840×2160 @ 20fps
Wide Dynamic Range	120dB
Housing	Metal+Plastic
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-35°C to 65°C, 0-95% RH
AI	Support human/vehicle classification

CS-18KS D-2.8mm

Value Series

Sharp Series

Intelligent Series



6 YEAR
WARRANTY

Image Sensor	5MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	1/1
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP66
Max. Resolution & Frame Rate	2880×1620 @ 25 fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	1/1
Memory Slot	512GB
Video Compression	S+265/H.265/H.264
Operating Conditions	-40°C to 65°C, 0-95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification

Value Series

Sharp Series

Intelligent Series

CS-15PS 2.8mm



6 YEAR
WARRANTY

Image Sensor	4MP
Lens	Motorized 2.8-12 mm
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP67, IK08
Max. Resolution & Frame Rate	2560×1440 @ 30fps
Wide Dynamic Range	120dB
Housing	Plastic
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-30°C to 60°C, 0-95% RH
AI	Support human/vehicle classification

ValueSeries

Sharp Series

Intelligent Series

CS-14KS L-2.8-12mm



6 YEAR
WARRANTY

Image Sensor	4MP
Lens	Motorized 2.8-12 mm
Max. IR Distance	30m
Audio I/O	Microphone
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.02 Lux
White Light Distance	N/A
Protection	IP66
Max. Resolution & Frame Rate	2688x1520@25fps
Wide Dynamic Range	120dB
Housing	Plastic
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.262/H.264
Operating Conditions	-30°C to 60°C, 0-95% RH
AI	Tripwire, Perimeter, Motion detection

ValueSeries

Sharp Series


Intelligent Series

CS-14KN L-2.8-12mm



6 YEAR
WARRANTY

Image Sensor	8MP
Lens	2.7mm - 13.5 mm
Max. IR Distance	50m
Audio I/O	1/1
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP66, IK10
Max. Resolution & Frame Rate	3840x2160@30fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	2/1
Memory Slot	512GB
Video Compression	S+265/H.265/H.264 Motion JPEG
Operating Conditions	-40°C~65°C
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Crowd Detection, People Counting, On Duty Detection, Video Abnormal, Audio Abnormal, Heatmap, Safety Helmet Detection, Human/Vehicle Classification




CS-18MS 2.7-13.5mm

Value Series

Sharp Series

Intelligent Series

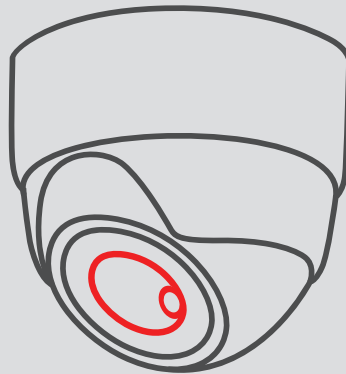

Turrets



CS-14HS L-2.8mm



CS-14XS LD-2.8mm



CS-16XN L-2.8mm



CS-15XS L-2.8mm



CS-15XS MD-2.8mm



CS-18XS SD-2.8mm



CS-15XP 2.8mm



CS-14SV S-2.8mm



CS-15XQ 2.8mm



CS-18XQ 2.8mm



CS-186V I-180



CS-18SS 2.7-13.5mm



6YEAR
WARRANTY

Image Sensor	4MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP66
Max. Resolution & Frame Rate	2560×1440 @ 25fps
Wide Dynamic Range	Digital WDR
Housing	Metal+Plastic
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264
Operating Conditions	-30°C to 60°C, 0-95% RH
AI	Tripwire, Perimeter, Motion Detection

CS-14HS L-2.8mm

Value Series

Sharp Series

Intelligent Series



6YEAR
WARRANTY

Image Sensor	4MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	15m
Protection	IP67
Max. Resolution & Frame Rate	2560×1440 @ 30fps
Wide Dynamic Range	TWDR
Housing	Metal+Plastic
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-30°C to 60°C, 0-95% RH
AI	Support human/vehicle classification

CS-14XS L-2.8mm

Value Series

Sharp Series

Intelligent Series



6 YEAR
WARRANTY

Image Sensor	6MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	15m
Protection	IP66
Max. Resolution & Frame Rate	3200×1800 @ 30fps
Wide Dynamic Range	WDR
Housing	Metal+Plastic
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-30°C to 60°C, 0-95% RH
AI	Support human/vehicle classification

CS-16XN L-2.8mm

ValueSeries

Sharp series

Intelligent Series



6YEAR
WARRANTY

Image Sensor	5MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP67
Max. Resolution & Frame Rate	2592×1944 @ 20fps
Wide Dynamic Range	120dB
Housing	Metal+Plastic
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264
Operating Conditions	-40°C to 60°C, 0-95% RH
AI	Tripwire, Perimeter, Motion Detection

Value Series

Sharp Series

Intelligent Series

CS-15XS S-2.8mm



6YEAR
WARRANTY

Image Sensor	5MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	15m
Protection	IP67
Max. Resolution & Frame Rate	3072x1728 @ 30fps
Wide Dynamic Range	120dB
Housing	Metal+Plastic
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-35°C to 65°C, 0-95% RH
AI	Support human/vehicle classification

Value Series

Sharp Series

Intelligent Series

CS-15XS SD-2.8mm



6YEAR
WARRANTY

Image Sensor	8MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	15m
Protection	IP67
Max. Resolution & Frame Rate	3840×2160 @ 20fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264
Operating Conditions	-35°C to 65°C, 0-95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification

CS-18XS MD-2.8mm

Value Series

Sharp Series

Intelligent Series



6YEAR
WARRANTY

Image Sensor	5MP
Lens	2.8mm Fixed
Max. IR Distance	N/A
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.0004 Lux
White Light Distance	15m
Protection	IP67
Max. Resolution & Frame Rate	3072x1728 @ 20fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264
Operating Conditions	-35°C to 65°C, 0-95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification



CS-15XP 2.8mm

Value Series

Sharp Series

Intelligent Series



6YEAR
WARRANTY

Image Sensor	4MP
Lens	2.8mm Fixed focal lens
Max. IR Distance	N/A
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.0001 Lux
White Light Distance	10m
Protection	IP67
Max. Resolution & Frame Rate	2688x1520@25fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-40°C~65°C, ≤95%RH
AI	Human/Vehicle Classification; Tripwire; Perimeter

CS-14SV S-2.8mm

Value Series

Sharp Series

Intelligent Series



6YEAR
WARRANTY

Image Sensor	5MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	1/1
Built-In Microphone	Yes
Built-In Speaker	Yes
Min. Illumination	Color - 0.002 Lux
White Light Distance	15m
Protection	IP67
Max. Resolution & Frame Rate	2880x1620 @ 30fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	(1/1)
Memory Slot	512GB
Video Compression	S+265/H.265/H.264
Operating Conditions	-40°C to 65°C, 0~95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification, Face Capture



CS-15XQ 2.8mm

Value Series

Sharp Series

Intelligent Series



6YEAR
WARRANTY

Image Sensor	8MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	1/1
Built-In Microphone	Yes
Built-In Speaker	Yes
Min. Illumination	Color - 0.002 Lux
White Light Distance	15-20m
Protection	IP67
Max. Resolution & Frame Rate	3840x2160 @ 20fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	(1/1)
Memory Slot	512GB
Video Compression	S+265/H.265/H.264
Operating Conditions	-40°C to 65°C, 0~95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification



CS-18XQ 2.8mm

Value Series

Sharp Series

Intelligent Series



6 YEAR
WARRANTY

Image Sensor	8MP (4+4) Stitched
Lens	2.8mm Fixed focal lens
Max. IR Distance	30m
Audio I/O	1×input, 1×output
Built-In Microphone	1×Built-in Mic
Built-In Speaker	1×Built-in Loudspeaker
Min. Illumination	0.0009 Lux
White Light Distance	30m
Protection	IP67
Max. Resolution & Frame Rate	4640×1728@25fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	1×input, 1×output
Memory Slot	512GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-35°C~65°C, ≤95%RH
AI	Human/Vehicle Classification; Tripwire; Perimeter; Video Abnormal; Audio Abnormal



CS-186V I-180

Value Series


Sharp Series

Intelligent Series



6YEAR
WARRANTY

Image Sensor	8MP
Lens	2.7mm - 13.5 mm
Max. IR Distance	50m
Audio I/O	1/1
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP67
Max. Resolution & Frame Rate	3840×2160@30fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	2/1
Memory Slot	512GB
Video Compression	S+265/H.265/H.264 Motion JPEG
Operating Conditions	-35°C to 65°C, 0-95% RH
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Crowd Detection, People Counting, On Duty Detection, Video Abnormal, Audio Abnormal, Heatmap, Safety Helmet Detection, Human/Vehicle Classification




CS-18SS 2.7-13.5mm

Value Series

Sharp Series

Intelligent Series

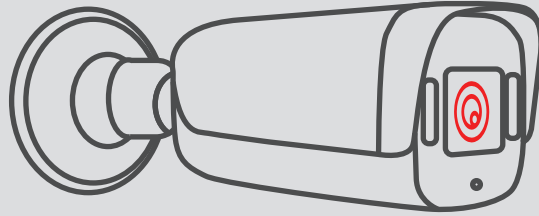

Bullets



CS-I8WS 2.8mm



CS-I8WQ 2.8mm



CS-I4UV 4mm



CS-I85N L-180



CS-I82V 180



CS-I4UN L-2.8-12mm



CS-I4US L-2.8-12mm



CS-I8TS 2.7-13.5mm



CS-I5LQ T-4mm



6YEAR
WARRANTY



Image Sensor	8MP
Lens	2.8mm Fixed
Max. IR Distance	50m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.003 Lux
White Light Distance	N/A
Protection	IP67
Max. Resolution & Frame Rate	3840x2160 @ 20fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264
Operating Conditions	-40°C to 65°C, 0-95% RH
AI	Tripwire, Perimeter, Motion Detection

Value Series

Sharp Series

Intelligent Series

CS-18WS 2.8mm



6 YEAR
WARRANTY



Image Sensor	8MP
Lens	2.8mm Fixed
Max. IR Distance	50m
Audio I/O	1/1
Built-In Microphone	Yes
Built-In Speaker	Yes
Min. Illumination	Color - 0.002 Lux
White Light Distance	15-20m
Protection	IP67
Max. Resolution & Frame Rate	3840×2160 @ 20fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	(1/1)
Memory Slot	512GB
Video Compression	S+265/H.265/H.264
Operating Conditions	-40°C to 65°C, 0-95% RH
AI	Tripwire, Perimeter, Human/Vehicle Classification



CS-18WQ 2.8mm

Value Series

Sharp Series

Intelligent Series



6 YEAR
WARRANTY



Image Sensor	4MP
Lens	4mm Fixed
Max. IR Distance	N/A
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	Color - 0.0001 Lux
White Light Distance	15m
Protection	IP67
Max. Resolution & Frame Rate	2688x1520 @ 30fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264
Operating Conditions	-40°C to 65°C, 0-95% RH
AI	Tripwire, Perimeter, Human/Vehicle Classification



CS-14UV 4mm

Value Series

Sharp Series

Intelligent Series



6YEAR
WARRANTY

Image Sensor	8MP (4+4) Non-Stitched
Lens	2.8mm Fixed focal lens
Max. IR Distance	50m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	Color - 0.02 Lux
White Light Distance	30m
Protection	IP67
Max. Resolution & Frame Rate	2560x1440@20fps
Wide Dynamic Range	DWDR
Housing	Plastic
Alarm I/O	N/A
Memory Slot	N/A
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-30°C~60°C, ≤95%RH
AI	Smart Alarm(Human and Vehicle Detection)



CS-185N L-180

Value Series

Sharp Series

Intelligent Series



6 YEAR
WARRANTY



Image Sensor	8MP (4+4) Stitched
Lens	2.8mm Fixed
Max. IR Distance	N/A
Audio I/O	1/1
Built-In Microphone	Yes
Built-In Speaker	Yes
Min. Illumination	Color - 0.0001 Lux
White Light Distance	15m
Protection	IP67
Max. Resolution & Frame Rate	4640x1728 @ 25fps
Wide Dynamic Range	120dB
Housing	Metal + Plastic
Alarm I/O	(1/1)
Memory Slot	512GB
Video Compression	S+265/H.265/H.264
Operating Conditions	-40°C to 65°C, 0~95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification



Value Series

Sharp Series

Intelligent Series

CS-182V 180



6YEAR
WARRANTY



Image Sensor	4MP
Lens	Motorized 2.8-12mm
Max. IR Distance	80m
Audio I/O	Microphone
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.02 Lux
White Light Distance	N/A
Protection	IP67
Max. Resolution & Frame Rate	2688×1520@25fps
Wide Dynamic Range	120dB
Housing	Metal + Plastic
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-30°C~60°C, 0~95% RH
AI	Tripwire, Perimeter

CS-14UN L-2.8-12mm

ValueSeries

Sharp Series

Intelligent Series



6YEAR
WARRANTY



Image Sensor	4MP
Lens	Motorized 2.8-12mm
Max. IR Distance	80m
Audio I/O	Microphone
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP67
Max. Resolution & Frame Rate	2560×1440@30fps
Wide Dynamic Range	TWDR
Housing	Metal + Plastic
Alarm I/O	N/A
Memory Slot	512GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-30°C to 60°C, 0-95% RH
AI	Smart Alarm(Human and Vehicle Detection)

ValueSeries

Sharp Series

Intelligent Series


CS-14US L-2.8-12mm



6YEAR
WARRANTY



Image Sensor	8MP
Lens	2.7mm - 13.5 mm
Max. IR Distance	80m
Audio I/O	1/1
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP67
Max. Resolution & Frame Rate	3840×2160@30fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	2/1
Memory Slot	512GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-40°C~65°C(No turning on the light), Humidity 95% or less (no condensation)
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Crowd Detection, People Counting, On Duty Detection, Video Abnormal, Audio Abnormal, Heatmap, Safety Helmet Detection, Human/Vehicle Classification



CS-18TS 2.7-13.5mm

Value Series

Sharp Series


Intelligent Series



6YEAR
WARRANTY



Image Sensor	Optical: 2880x1620@30fps Thermal: 256 x192@25fps Vanadium Oxide Uncooled Focal Plane Arrays
Pixel Interval	12µm
Temperature Detection	-15.0°~150.0°、50.0°~550.0°、Auto
NETD	≤ 45 mK (@ 25°C, F# = 1.0)
Min. Illumination	0.002 Lux
FOV	Horizontal FOV:88.7°, Vertical FOV:46.8°, Diagonal FOV:102°
Measurement Accuracy	Max. (± 2°C, ± 2%)
Wide Dynamic Range	120 dB
Focal Length	Visible Light: 4mm, Thermal: 3.2mm
Video Analytics	Tripwire, Double Tripwire, Perimeter, Video Abnormal, Audio Abnormal, Human/Vehicle Classification
Operating Conditions	-35°C~65°C, 0~95% RH
Protection	IP67



CS-15LQ T-4mm

Value Series

Sharp Series

Intelligent Series



Speed Domes



CS-P34S WIFI-4mm



CS-P63N WIFI-4mm



CS-P24S 23X



CS-P44S 25XA



CS-P66V 25XA-180



CS-P48 63X



CS-P88 44XA



CS-P58 T-44X



Megapixel	3 MP
Lens / Zoom	4mm Fixed
Max. IR Distance	50m
Auto Tracking	Yes
Max. Resolution & Frame Rate	2304 × 1296 @ 25 fps
Built-In Microphone	Yes
Built-In Speaker	Yes
Audio I/O	N/A
Alarm I/O	N/A
Min. Illumination	0.002 Lux
Protection	IP66
Memory Slot	512 GB
Power	DC 12V±25%
Operating Conditions	-30°C to 60°C, <95% RH
AI	Tripwire, Perimeter, Motion Detection, Human Tracking



CS-P34S WIFI-4mm

Value Series

Sharp Series

Intelligent Series



Megapixel	6 MP (2* 3 MP)
Lens / Zoom	4mm
Max. IR Distance	50m
Auto Tracking	Yes
Max. Resolution & Frame Rate	2560 × 1440 @ 30 fps
Built-In Microphone	Yes
Built-In Speaker	Yes
Audio I/O	N/A
Alarm I/O	N/A
Min. Illumination	0.02 Lux
Protection	IP66
Memory Slot	512 GB
Power	DC12V±25%, MAX. 13W
Operating Conditions	-30°C to 65°C , <95% RH
AI	Human/ Vehicle Tracking



CS-P63N WIFI-4mm

Value Series

Sharp Series

Intelligent Series



Megapixel	2 MP
Lens / Zoom	55-115mm (23x)
Max. IR Distance	150m
Auto Tracking	N/A
Max. Resolution & Frame Rate	1920 × 1080 @ 30 fps
Built-In Microphone	N/A
Built-In Speaker	N/A
Audio I/O	N/A
Alarm I/O	N/A
Min. Illumination	0.001 Lux
Protection	IP66
Memory Slot	512 GB
Power	DC12V±10%; PoE:IEEE 802.3at
Operating Conditions	-30°C to 65°C, <95% RH
AI	Human/ Vehicle Classification: Tripwire, Double Tripwire, Perimeter, Object Abandon, Object missing, Heat map, Video Abnormal

CS-P24S 23X


Value Series

Sharp Series

Intelligent Series



Megapixel	4 MP
Lens / Zoom	4.8mm - 120mm
Max. IR Distance	150m
Auto Tracking	Yes
Max. Resolution & Frame Rate	2560 × 1440 @ 30 fps
Built-In Microphone	N/A
Built-In Speaker	N/A
Audio I/O	1/1
Alarm I/O	1/1
Min. Illumination	0.001 Lux
Protection	IP66
Memory Slot	512 GB
Power	DC12V±10%/POE+(IEEE802.3 at)
Operating Conditions	-30°C to 65°C , <95% RH
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Heatmap, Crowd Detection, People Counting, On Duty Detection, Safety Helmet Detection, Video Abnormal, Audio Abnormal, Human/Vehicle Classification, Face Capture



CS-P44S 25XA


Value Series

Sharp Series

Intelligent Series



Megapixel	Panorama: 6 MP - PTZ: 4 MP
Lens / Zoom	Panorama: 2.8mm - PTZ: 4.8-120mm (25X)
Max. IR Distance	150m
Auto Tracking	Yes
Max. Resolution & Frame Rate	Panorama: 3840×1568 @ 30 fps - PTZ: 2560×1440@ 30 fps
Built-In Microphone	N/A
Built-In Speaker	Yes
Audio I/O	1/1
Alarm I/O	2/1
Min. Illumination	Color - 0.0001 Lux
Protection	IP66
Memory Slot	512 GB
Power	AC24V±25%; DC24V±10%; POE 802.3bt
Operating Conditions	-30°C to 65°C , <95% RH
AI	Panorama AI: Tripwire, Double Tripwire, Heatmap, Human & Vehicle Classification PTZ AI: Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Crowd Detection, People Counting, On Duty Detection, Video Abnormal, Audio Abnormal, Human & Vehicle Classification, Face Capture



CS-P66V 25XA-180


Value Series

Sharp Series

Intelligent Series



Megapixel	4 MP
Lens / Zoom	Motorized lens 5.7-359mm (63X)
Max. IR Distance	300m
Auto Tracking	Yes
Laser	Up to 500m
Max. Resolution & Frame Rate	2560x1440 @ 30 fps
Built-In Microphone	N/A
Built-In Speaker	Yes
Audio I/O	1/1
Alarm I/O	8/2
Min. Illumination	0.001 Lux
Protection	IP66, TVS 6000V lightning protection, surge protection and voltage transient protection
Memory Slot	512 GB
Power	DC36V±25%, POE++(IEEE802. bt)
Operating Conditions	-40°C to 70°C (IR OFF), -40°C to 40°C (IR ON), 0-95%RH
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Heatmap, Crowd Detection, People Counting, On Duty Detection, Safety Helmet Detection, Video Abnormal, Audio Abnormal, Face Capture



CS-P48 63X


Value Series

Sharp Series

Intelligent Series



Megapixel	8 MP
Lens / Zoom	Motorized lens 5.7-250 mm (44X)
Max. IR Distance	300m
Auto Tracking	Yes
Laser	Up to 500m
Max. Resolution & Frame Rate	3840 × 2160 @ 30 fps
Built-In Microphone	N/A
Built-In Speaker	Yes
Audio I/O	1/1
Alarm I/O	8/2
Min. Illumination	0.001 Lux
Protection	IP66
Memory Slot	512 GB
Power	DC36V±25%, PoE:IEEE 802.3bt
Operating Conditions	-40°C to 70°C , <95% RH
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Heatmap, Crowd Detection, People Counting, On Duty Detection, Safety Helmet Detection, Human/Vehicle Classification, Face Capture



CS-P88 44X


Value Series

Sharp Series

Intelligent Series



Megapixel	Vanadium Oxide Uncooled Focal Plane Arrays
Thermal Resolution	384×288
Optical Resolution	up to 3072×1728@30fps
Smart IR, IR Range	300m
Built-in Parts	Mic, Speaker, Automatic Wiper, Electronic Compass, GPS/BDS
Pixel Interval	17μm
Response Waveband	8μm~14μm
NETD	≤40mK@f/1.0
Min. Illumination	0.001Lux
Thermal FOV	Horizontal: 7.5°, Vertical: 5.6° (Fixed 50mm)
Fire Detection Distance Based on the reference	Fire (2m×2m) 3000m
Wide Dynamic Range	120dB
Focal Length	6mm~264mm
Optical Lens Video Analytics	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Heatmap, Video Abnormal, Crowd Detection, Audio Abnormal, Demographics (People Counting), On Duty Detection, Safety Helmet Detection, Auto-Tracking, Face Capture, Early Warning
Thermal Lens Video Analytics	Tripwire, Double Tripwire, Perimeter, Temperature Alarm, Fire / Smoke Detection
Operating Conditions	-40°C to 70°C, 0-95%RH
Protection	IP66, Lightning Protection, Surge Protection and Voltage Transient Protection meets EN 55035:2017




CS-P58 T-44X

Value Series

Sharp Series

Intelligent Series

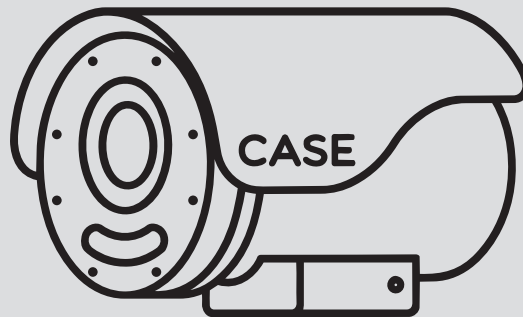

Special Cameras



CS-I5VN S-1.4mm



CS-I4CN L-WIFI-2.8mm



CS-I8RN S-2.8mm



**CS-I8PS EX-I-2.7
13.5MM**



CS-P49S EX-63X



CS-I2PN WIFI-4mm



6YEAR
WARRANTY

Image Sensor	5MP
Lens	1.4mm Fixed focal lens
Max. IR Distance	30m
Audio I/O	1×input, 1×output
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.02 Lux
White Light Distance	N/A
Protection	Indoor Usage
Max. Resolution & Frame Rate	2592×1944@30fps
Wide Dynamic Range	120dB
Housing	Metal+plastic
Alarm I/O	1/1
Memory Slot	512GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-40°C~65°C, ≤95%RH
AI	Tripwire; Double Tripwire; Perimeter; Heatmap

CS-15VN S-1.4mm(Indoor)

Value Series

Sharp Series

Intelligent Series



6YEAR
WARRANTY

Image Sensor	4MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O, Alarm I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	Yes
Min. Illumination	0.002 Lux
White Light Distance	20m
Protection	IP65
Max. Resolution & Frame Rate	4MP,2560x1440@ 20fps
Wide Dynamic Range	DWDR
Housing	Plastic
Memory Slot	256GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-10°~50°, ≤95%RH
battery capacity	5200mAh
AI	Support human/vehicle classification



CS-14CN L-WIFI-2.8mm

Value Series

Sharp Series

Intelligent Series



6YEAR
WARRANTY

Image Sensor	8MP (4+4) Non-Stitched
Lens	2.8mm Fixed focal lens
Max. IR Distance	50m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.02 Lux
White Light Distance	30m
Protection	IP67
Max. Resolution & Frame Rate	2560x1440@20fps
Wide Dynamic Range	DWDR
Housing	plastic
Alarm I/O	N/A
Memory Slot	N/A
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-30°C~60°C, ≤95%RH
AI	Smart Alarm (Human and Vehicle Detection)

CS-18RN S-2.8mm

Value Series


Sharp Series

Intelligent Series

Explosion proof



6YEAR
WARRANTY

Image Sensor	8MP (3840×2160@30fps)
Lens	2.7mm - 13.5 mm
Max. IR Distance	80m
Audio I/O	1/1
Built-In Microphone	Yes
Min. Illumination	0.003 Lux
Protection	IP66, IP68 (2m 2h), IP69
Wide Dynamic Range	120dB
Housing	Stainless steel 304 or 316L
Alarm I/O	2/1
Video Compression	S+265/H.265/H.264 Motion JPEG
Certification	ATEX, IECEx certified
Explosion Proof Certification	DNV 22 ATEX 51565X, IECEx DNV 22.0097X
IECEx Explosion Proof Marking	Ex db IIC T6 Gb/Ex tb IIIC T80°C Db
ATEX Explosion Proof Marking	 2460 II 2 G Ex db IIC T6 Gb II 2 D Ex tb IIIC T80°C Db
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Crowd Detection, People Counting, On Duty Detection, Video Abnormal, Audio Abnormal, Heatmap, Safety Helmet Detection, Human/Vehicle Classification



CS-18PS EX-I-2.7-13.5MM

Value Series

Sharp Series


Intelligent Series

Explosion proof



6 YEAR
WARRANTY

Image Sensor	4MP (2560x1440)
Lens	Motorized lens 5.7-359mm (63X)
Max. IR Distance	300m
Audio I/O	1/1
Built-In Microphone	N/A
Min. Illumination	0.001 Lux
Protection	IP68 (2m/ 2H)
Housing	Stainless steel 304 or 316L
Alarm I/O	8/2
Video Compression	S+265/H.265/H.264 (High profile, Main profile, Baseline)
Certification	Presafe 17 ATEX 11328X, IECEx PRE 18.0030X
Explosion Proof Certification	IEC/EN60079
IECEX Explosion Proof Marking	Ex db IIC T6 Gb/Ex tb IIIC T80 °C Db
ATEX Explosion Proof Marking	<p>CE₂₄₆₀ Ex II 2G Ex db op is IIC T6 Gb,</p> <p>Ex II 2D Ex tb op is IIIC T80 °C Db</p>
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Heatmap, Crowd, People Counting, On Duty Detection, Safety Helmet Detection, Video Abnormal, Audio Abnormal



CS-P49S EX-63X

Value Series

Sharp Series

Intelligent Series




Megapixel	2 MP
Lens Type / Zoom	Pinhole, 3.7mm Fixed
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	Color: 0.01 Lux @ (F2.0, AGC ON), B/W: 0.001 Lux (F2.0, AGC ON)
Max. Resolution	1080 × 1920
Wide Dynamic Range	True WDR
Iris	Fixed Iris
Max. Aperture	F2.0
Field of View (FOV)	H: 81.9°, V: 40.8°
Multi-Object Detection	Supports face, human and vehicle detection
Intelligent Analytics	Intrusion, Single line crossing, Double line crossing, Loitering, Wrong-way Support alarm triggering by specified target types (human and vehicle)
Streaming Capability	3 Streams
Interoperability	ONVIF (Profile S/T/G/M), SDK, CGI
SD Card Slot	Built-in, up to 256 GB
Housing	Metal

CS-12PN WIFI-4mm

Value Series

Sharp Series

Intelligent Series



NVRs



CS-N105 P4



CS-N110 P8



CS-N110 P8H-AI



CS-N220 P16H-AI



CS-N440 NHC



CS-N440 M-AI




CS-N440 P16H-AI



CS-N880 NHC



CS-N880 H-AI

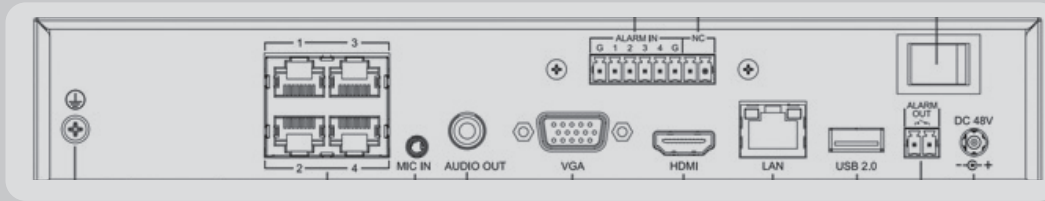


IP Video Output	5CH
PoE Port	4 PoE Ports
Bandwidth I/O	80Mbps / 80Mbps
Resolution	8MP
Display Ports	HDMI and VGA (simultaneous)
Storage	1x10TB HDD
Alarm I/O	4 Alarm Inputs / 1 Output
Ethernet port	1xRJ45 self-adaptive 10/100 Mbps

Value Series

Sharp Series

Intelligent Series

CS-N105 P4

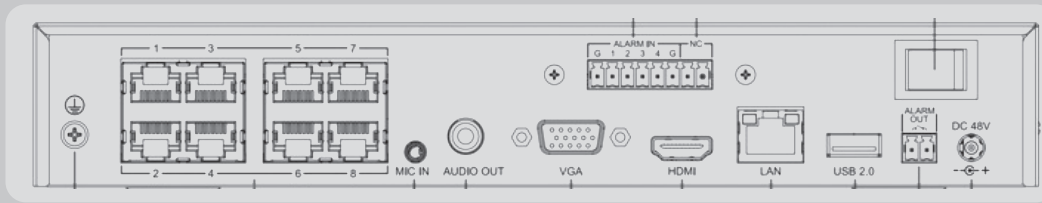


IP Video Output	10CH
PoE Port	8 PoE ports
Bandwidth I/O	80Mbps / 80Mbps
Resolution	8MP
Display Ports	HDMI and VGA (simultaneous)
Storage	1x10TB HDD
Alarm I/O	4 Alarm Inputs / 1 Output
Ethernet port	1xRJ-45 Port, 10/100Mbps

Value Series

Sharp Series

Intelligent Series

CS-N110 P8

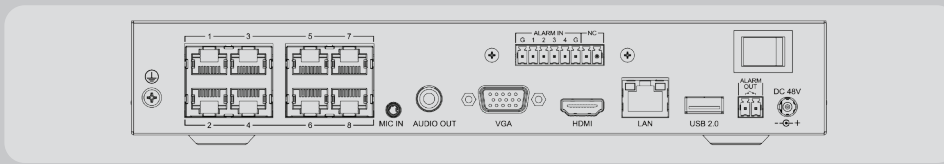


IP Video Output	10CH
PoE Port	8
Bandwidth I/O	100Mbps / 80Mbps
Resolution	16MP
Display Ports	HDMI and VGA outputs (Simultaneous)
Storage	Up to 10 TB capacity for each HDD
Alarm I/O	4-ch, TTL inputs, 3mA, 3.3VDC; 1-ch, relay output, 1A, 24VDC
Ethernet port	1×RJ45, 10/100 Mbps self-adaptive
AI by NVR	Face Detection; Face Recognition; Tripwire; Double Tripwire; Perimeter; Smart Motion Detection
VCA Search	Early-warning Search; Behavior Search; Safety Helmet Search; Thermographic Retrieval; Duty Search; Electric Bicycle Retrieval; Face Search(Search by face attributes); Smart Motion Detection

Value Series

Sharp Series

Intelligent Series

CS-N110 P8H-AI

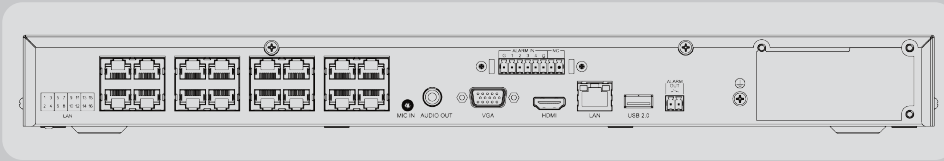


IP Video Output	20CH
PoE Port	16
Bandwidth I/O	80Mbps / 160Mbps(AI on: 120Mbps)
Resolution	16MP
Display Ports	HDMI and VGA (simultaneous)
Storage	Up to 10 TB capacity for each HDD
Alarm I/O	4-ch, TTL inputs, 3mA, 3.3VDC; 1-ch, relay output, 1A, 24VDC
Ethernet port	1×RJ45, 10/100 Mbps self-adaptive
AI by NVR	Face Detection; Face Recognition; Tripwire; Double Tripwire; Perimeter; Smart Motion Detection
VCA Search	Early-warning Search; Behavior Search; Safety Helmet Search; Thermographic Retrieval; Duty Search; Electric Bicycle Retrieval; Face Search(Search by face attributes); Smart Motion Detection

Value Series

Sharp Series

Intelligent Series

CS-N220 P16H-AI

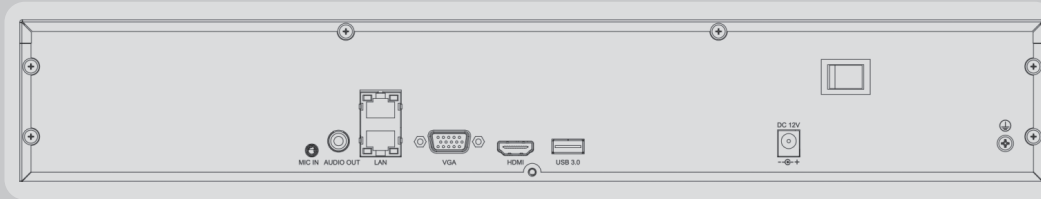


CS-N440 NHC

Value Series


Sharp Series

Intelligent Series

IP Video Output	40CH
PoE Port	N/A
Bandwidth I/O	400Mbps / 400Mbps
Resolution	16MP
Display Ports	1xHDMI and 1xVGA (independent)
Storage	4x10TB HDD
Alarm I/O	N/A
Ethernet port	2xRJ-45 10/100/1000 Mbps

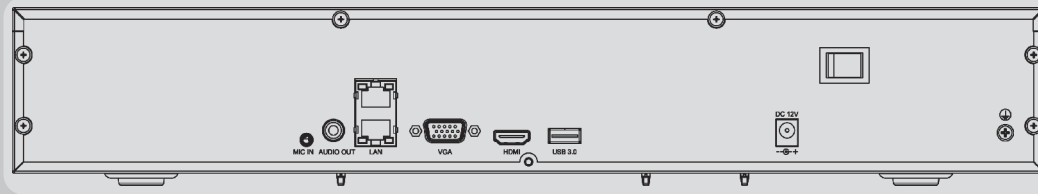

IP Video Output	40CH
PoE Port	N/A
Bandwidth I/O	400Mbps / 400Mbps (AI on: 200Mbps / 200Mbps)
Resolution	16MP
Display Ports	1xHDMI and 1xVGA (independent)
Storage	4x10TB HDD
Alarm I/O	N/A
Ethernet port	2xRJ-45 10/100/1000 Mbps
AI by NVR	Face Detection; Face Recognition; Video Structuralization(excludes vehicle detection); Tripwire; Double Tripwire; Perimeter; Object Abandon; Object Missing; Running; Parking; Heatmap; Sleeping on Duty Detection; On Duty Detection; Smart Motion Detection; Loitering
VCA Search	Heatmap; Early-warning Search; Behavior Search; Thermographic Retrieval; Duty Search; Electric Bicycle Retrieval; Face Search; Safety Helmet Search




CS-N440 M-AI


Value Series

Sharp Series

Intelligent Series

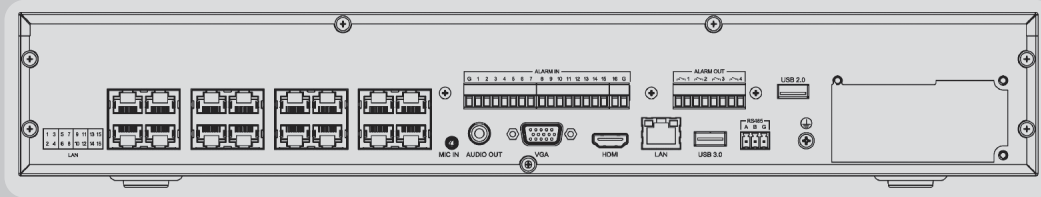

IP Video Output	40CH
PoE Port	16 PoE ports
Bandwidth I/O	400Mbps / 400Mbps (AI on: 200Mbps / 200Mbps)
Resolution	16MP
Display Ports	1xHDMI and 1xVGA (independent)
Storage	4x10TB HDD
Alarm I/O	16 Alarm Inputs / 4 Outputs
Ethernet port	1xRJ45 10/100/1000 Mbps
AI by NVR	Face Detection; Face Recognition; Video Structuralization(excludes vehicle detection); Tripwire; Double Tripwire; Perimeter; Object Abandon; Object Missing; Running; Parking; Heatmap; Sleeping on Duty Detection; On Duty Detection; Smart Motion Detection; Loitering
VCA Search	Heatmap; Early-warning Search; Behavior Search; Thermographic Retrieval; Duty Search; Electric Bicycle Retrieval; Face Search; Safety Helmet Search




CS-N440 P16-H-AI

Value Series

Sharp Series

Intelligent Series

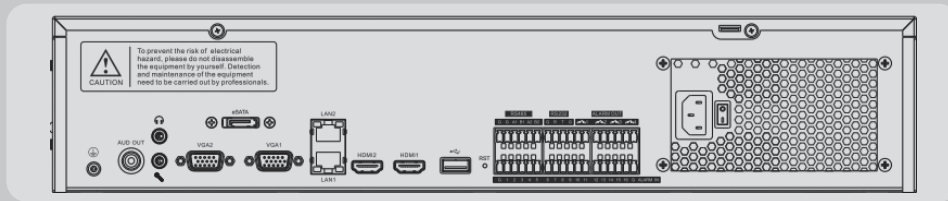


IP Video Output	80CH
PoE Port	N/A
Bandwidth I/O	640Mbps / 320Mbps
Resolution	16MP
Display Ports	Simultaneous HDMI2 and VGA2 outputs
Storage	8x24TB HDD
Alarm I/O	16 Alarm Inputs / 4 Outputs
Ethernet port	2xRJ-45 10/100/1000 Mbps

Value Series


Sharp Series

Intelligent Series

CS-N880 NHC

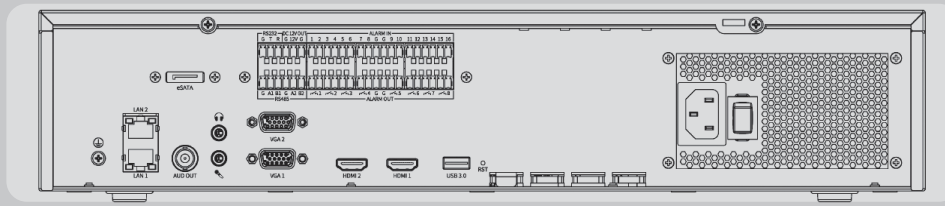

IP Video Output	80CH
PoE Port	N/A
Bandwidth I/O	400Mbps / 400Mbps (AI on: 320Mbps / 200Mbps)
Resolution	16MP
Display Ports	2x HDMI and 2x VGA (independent)
Storage	8x24TB HDD
Alarm I/O	16 Alarm Inputs / 4 Outputs
Ethernet port	2xRJ-45 10/100/1000 Mbps
AI by NVR	Face Detection; Face Recognition; Video Structuralization(excludes vehicle detection); Tripwire; Double Tripwire; Perimeter; Object Abandon; Object Missing; Running; Parking; Heatmap; Sleeping on Duty Detection; On Duty Detection; Smart Motion Detection; Loitering
VCA Search	Heatmap; Early-warning Search; Behavior Search; Thermographic Retrieval; Duty Search; Electric Bicycle Retrieval; Face Search; Safety Helmet Search



Value Series

Sharp Series

Intelligent Series

CS-N880 H-AI

Accessories





ACCESSORIES

SWITCHES




WALL MOUNTS



JUNCTION BOXES



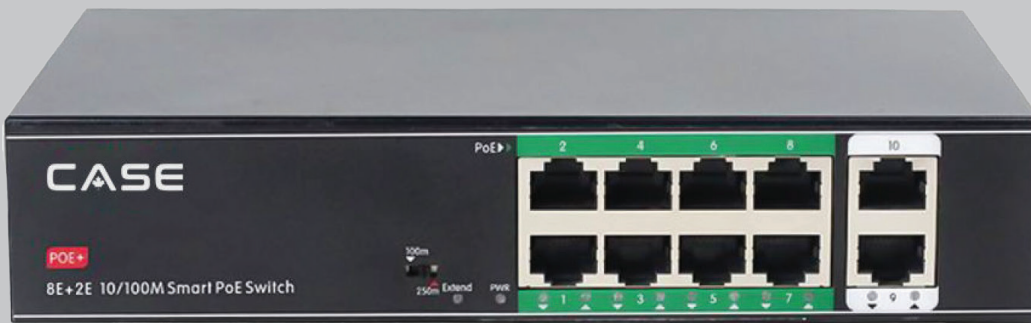


Ports	8×10/100M PoE + 2×10/100M uplink
PoE Standard	IEEE802.3af/at
Max PoE Power / Port	30W
Total PoE Budget	100W
Uplink Ports	2×10/100M RJ45
Transmission Distance	100m (Standard) / 250m (Extend Mode)
Input Voltage	AC100–240V, 50–60Hz, 2.2A
Power Consumption	<5W (Standby) / <100W (Full Load)
Dimensions (L×W×H)	195×130×40mm
Weight (Net / Gross)	0.75kg / 1.0kg
Operating Temperature	–20°C to +55°C
Humidity	5–90% RH (Non-condensing)
Installation	Desktop or wall-mount
Protection	4KV lightning / IP30
Certifications	CCC, CE, FCC, RoHS

CS-H1108PLS

Value Series

Sharp Series

Intelligent Series

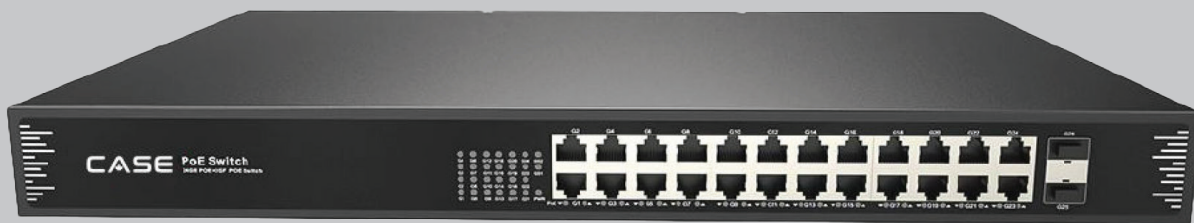

Ports	24 × 10/100/1000M RJ45 PoE Ports
PoE Standard	IEEE 802.3af/at
Max PoE Power / Port	30W
Total PoE Budget	400W / 600W
Uplink Ports	2 × 1000M SFP Fiber Ports
Power Consumption	Standby <25W, Full Load <380W / <600W
Input Voltage	AC 100–240V, 50/60Hz
Dimensions (L×W×H)	440 × 225 × 44 mm / 440 × 290 × 44.5 mm
Weight (Net / Gross)	3.0kg / 3.7kg or 3.2kg / 3.9kg
Operating Temperature	-20°C ~ +55°C
Humidity	5% ~ 90% RH Non-condensing
Installation	Desktop, Wall Mount, 1U/19" Rack Mount
Protection	4KV Lightning Protection, IP30
Certifications	CCC, CE, FCC Part 15 Class B, RoHS, CE/LVD EN62368-1

CS-POE33024PF

Value Series

Sharp Series

Intelligent Series



Ports	8 × 10/100/1000M RJ45 PoE Ports
PoE Standard	IEEE 802.3af/at
Max PoE Power / Port	30W
Total PoE Budget	130W / 250W
Uplink Ports	2 × 1000M SFP Fiber Ports
Power Consumption	Not specified
Input Voltage	AC 100–240V
Dimensions (L×W×H)	270 × 181 × 44.5 mm
Weight (Net / Gross)	1.3kg / 1.8kg or 1.5kg / 2.0kg
Operating Temperature	-20°C ~ +55°C
Humidity	5% ~ 90% RH Non-condensing
Installation	Desktop, Wall Mount, 1U/19" Rack Mount
Protection	4KV Lightning Protection, IP30
Certifications	CCC, CE, FCC Part 15 Class B, RoHS, CE/LVD EN62368-1

Value Series

Sharp Series

Intelligent Series

CS-POE33108PF



Ports	2x10/100/1000M RJ45 (Ethernet IN + PoE OUT)
PoE Standard	IEEE802.3af / IEEE802.3at
Max PoE Power / Port	15.4W (af) / 30W (at)
Total Power	18W (af) / 35W (at)
Network Medium	1000Base-T Cat5e or higher (≤100m)
Network Rate	10/100/1000Mbps
Thermal Protection	>100°C
Protection	IEC61000-4-2 (ESD) / Lightning protection
LED Indicator	PoE Working Status
DC Output Voltage	52V
Operating Temperature	-20°C to +55°C
Installation	Desktop or wall mount
LED Indicator	PoE Working Status
Certifications	CE, FCC Part 15 Class B, RoHS

CS-PSE3301AC

Value Series

Sharp Series

Intelligent Series



Ports	1*10/100Base-TX RJ45 port (Data) 1*8P male output port (Data) 1*DC5521 power port (Power)
PoE Standard	IEEE802.3af/at
Max PoE Power/Port	13W
Total PoE Budget	≤100m (Cat5 or higher)
Uplink Ports	-
Input Voltage	44–57VDC (via PoE)
Power Consumption	<1W standby / <13W full load
Dimensions (L×W×H)	85×31×26mm
Weight (Net / Gross)	<0.1kg / <0.15kg
Operating Temperature	-20°C to +55°C
Humidity	5–90% RH (Non-condensing)
Installation	Inline cable
Protection	4KV lightning / IP40
Certifications	CE, FCC, RoHS

ValueSeries

SharpSeries

IntelligentSeries

CS-PD5202

Wall Mounts



CS-A25



CS-A28



CS-A29

Corner Mount



CS-A35

Pendant Mount



CS-DF21Y

Pole Mount



CS-A36

To see which accessories are compatible with each camera, please check the specification sheets.

Junction Box




CS-P54BM V5/V3.0



CS-P32EM



CS-A22



CS-P54BM V3



CS-P54AM V4



CS-P54BM V1

To see which accessories are compatible with each camera, please check the specification sheets.

Information





LASER TRACKING

CASE PTZ cameras offer a unique third layer of defense with their optional laser beam feature. This advanced deterrent function enhances security by tracking intruders and intimidating them to prevent unauthorized access. It acts as an additional layer of protection, complementing the camera's warning flashlights and speaker system. The laser beam is visible to the human eye but is designed to be eye-safe, ensuring it provides effective deterrence without causing harm.




PANORAMIC VIEW

CASE dual lens 180-degree cameras provide an expansive and seamless panoramic view, capturing wide areas with remarkable clarity. By utilizing two lenses, these cameras stitch together a continuous 180-degree field of vision, eliminating blind spots and offering superior coverage compared to traditional single-lens cameras. This technology is especially advantageous in large spaces like parking lots, warehouses, or public areas, reducing the need for multiple cameras and minimizing installation costs. The dual-lens system also enhances image quality across the entire field of view, ensuring no detail is missed. CASE dual lens 180-degree cameras deliver comprehensive and reliable surveillance with enhanced efficiency.



AUTO TRACKING

Several of our CASE Pan-Tilt-Zoom (PTZ) cameras come equipped with an Auto-Tracking feature. This advanced functionality enhances your security system by automatically tracking any potential intruder or trespasser on the property. Auto-Tracking ensures that you capture high-quality footage and provides continuous monitoring of the intruder's movements, allowing you to see their direction and actions in real time. This feature is crucial for improving situational awareness and response capabilities.



AI

CASE Cameras are designed with advanced AI capabilities to enhance security and operational efficiency. They support essential features like line crossing and perimeter breach detection, ensuring timely alerts for unauthorized access. For more complex scenarios, the cameras offer cutting-edge AI analytics, including face capture, human and vehicle classification, and even safety helmet detection. These features make CASE Cameras an ideal solution for a wide range of applications, from basic surveillance to advanced safety and compliance monitoring.



THERMAL

CASE Thermal Cameras are equipped with thermal imaging technology, and they provide precise detection in complete darkness, harsh weather, or challenging environments where traditional cameras may fail. Its robust design ensures durability, while intelligent analytics, including human and vehicle classification, enhance security monitoring. Ideal for critical infrastructure, perimeter defense, and industrial applications, the CASE Thermal Camera offers reliable performance and peace of mind.



NightBright

Combined with a large aperture and a large sensor, Case NightBright technology enables the camera to obtain a large amount of light in low-light environments. Even in total darkness, cameras equipped with NightBright technology can capture vivid color images and reveal more details in scenes with the help of warm light illumination. Case NightBright technology makes it possible for the camera to achieve the goal of 24-hour full-color imaging.



EARLY WARNING

Based on AI deep learning, Case EWarning combines light and audio warnings to achieve prevention, mid-way intervention, and post-event investigation. It can precisely differentiate between vehicles and people, and warn them respectively, increasing the accuracy and effectiveness of warnings compared to traditional OpenCV systems.



WIFI

CASE WIFI Cameras offer a flexible and efficient surveillance solution for both residential and commercial applications. Designed for easy installation, these cameras eliminate the need for extensive wiring while maintaining high-quality video performance. Equipped with advanced features like motion detection, remote viewing, and two-way audio, they provide comprehensive monitoring and real-time interaction. With robust encryption and reliable connectivity, CASE WIFI Cameras ensure secure and uninterrupted surveillance, making them an ideal choice for modern security needs.

Software



Software

To ensure seamless connectivity and effective management of your CASE security systems, we have developed customized software for both personal computers and mobile devices. Our applications are compatible with Mac and Windows operating systems for PCs, and Android and iOS for mobile devices. By installing these tools, named Net Video for PCs and Video Sight for mobile devices, you will be able to view camera footage and manage your systems.

In addition, we provide the Search Config Tool, a practical utility designed to help you locate cameras and NVRs on your network, add them, and configure their settings. This tool also includes a storage calculator, allowing you to estimate the storage requirements based on the number of cameras and their megapixel specifications, thereby streamlining your project planning.

Video Sight



iOS



Android



NetVideo VMS



Mac



Windows



SEARCH CONFIG TOOL



Mac



Windows





6 Year
Warranty

24/7
Support

canadasecurity.com

