CASE
CANADA SECURITY

CATALOG

canadasecurity.com

6 Years WARRANTY

24/7 Support

NDAA COMPLIANT

2027 Q1


CASE
CASE
CANADA SECURITY

CASE
CANADA SECURITY

Table of Contents

About us 3

Technology Highlights 5

Domes 7

Turrets 15

Bullets 27

Speed Domes 36

Consumer Cameras 43

Special Cameras 51

NVRs 56

Accessories 66

CASE Project Series 75

Explosion Proof Solutions 76

Explosion Proof Solutions(Accessories) 83

Thermal Solutions 95

Solar Trailers 102

Radars 106

Software 109

Information 115


ABOUT US
CASE

Canada Security stands as a leading provider of surveillance equipment, backed by over 30 years of industry experience. Our extensive product range incorporates the latest technologies to address modern security challenges.

Our CASE team, which includes knowledgeable sales representatives and technical consultants across the U.S. and Canada, is committed to meeting your regional needs. We provide thorough support, from product selection to installation guidance and troubleshooting.


With a 6-year warranty on cameras and NVRs, we demonstrate our commitment to quality. Additionally, our systems fully comply with NDAA regulations, ensuring top-tier security standards.

ABOUT US



TECHNOLOGY HIGHLIGHTS

PhotonX
Darkness into Daylight Color: 0.0001 Lux




Advanced AI
Features 16 VCA Functions




NightBright
24-Hour Full Color




TVP
Transcendent Video Processing



AEW
Auto-tracking Early Warning




Panoramic
Panoramic Camera PTZ Camera



VMS
2,000-Channel Management



S+265
90% Storage Savings



Plugin-Free
No ActiveX



Human/Vehicle Classification
Fewer False Alarms



ONVIF
S,T,G,M Supported

CANADA SECURITY



Domes



CS-I4KS L-2.8mm



CS-I5KS SD-2.8mm



CS-I8KS SD-2.8mm



CS-I5PS S-2.8mm



CS-I4KS L-2.8-12mm



CS-I8MS SD-2.7-13.5mm



CS-I8MS I-2.7-13.5mm

CASE
CANADA SECURITY







6 YEAR WARRANTY

Image Sensor	4MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP66, IK10
Max. Resolution & Frame Rate	2560×1440@25fps
Wide Dynamic Range	Digital WDR
Housing	Metal+Plastic
Alarm I/O	N/A
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264
Operating Conditions	-30°C~60°C, 0~95% RH
AI	Tripwire, Perimeter, Motion Detection

NightBright

CS-I4KS L-2.8mm

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY







6 YEAR WARRANTY

Image Sensor	5MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	10m
Protection	IP67, IK10
Max. Resolution & Frame Rate	3072×1728@30fps
Wide Dynamic Range	120dB
Housing	Metal+Plastic
Alarm I/O	N/A
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-35°C ~ 65°C, 0~95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification

NightBright

CS-I5KS SD-2.8mm

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY







6 YEAR WARRANTY

Image Sensor	8MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	10m
Protection	IP67, IK10
Max. Resolution & Frame Rate	3840×2160@20fps
Wide Dynamic Range	120dB
Housing	Metal+Plastic
Alarm I/O	N/A
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-35°C to 65°C, 0~95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification

NightBright

CS-I8KS SD-2.8mm

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY







6 YEAR WARRANTY

Image Sensor	5MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	1/1
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP66, IK08
Max. Resolution & Frame Rate	2880x1620@30 fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	1/1
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-40°C to 65°C, 0~95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification, Face Capture

CS-I5PS S-2.8mm

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY







6 YEAR WARRANTY

CS-I4KS L-2.8-12mm

Value Series
Sharp Series
Intelligent Series

Image Sensor	4MP
Lens	Motorized 2.8-12 mm
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP67, IK08
Max. Resolution & Frame Rate	2560×1440@30fps
Wide Dynamic Range	120dB
Housing	Plastic
Alarm I/O	N/A
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-30°C to 60°C, 0~95% RH
AI	Smart Alarm (Human & Vehicle Detection)

CASE
CANADA SECURITY







6 YEAR WARRANTY

CS-I8MS SD-2.7-13.5mm

Value Series
Sharp Series
Intelligent Series

Image Sensor	8MP
Lens	2.7mm - 13.5 mm
Max. IR Distance	50m
Audio I/O	1/1
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	15m
Protection	IP67, IK10
Max. Resolution & Frame Rate	3840×2160@20fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	1/1
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-35°C~65°C, 0~95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification

CASE
CANADA SECURITY








6 YEAR WARRANTY

CS-I8MSI-2.7-13.5mm

Value Series
Sharp Series
Intelligent Series

Image Sensor	8MP
Lens	2.7mm - 13.5 mm
Max. IR Distance	50m
Audio I/O	1/1
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP66, IK10
Max. Resolution & Frame Rate	3840×2160@30fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	2/1
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264/Motion JPEG
Operating Conditions	-35°C~65°C, 0~95% RH
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Crowd Detection, People Counting, On Duty Detection, Video Abnormal, Audio Abnormal, Heatmap, Safety Helmet Detection, Human & Vehicle Classification

CASE
CANADA SECURITY

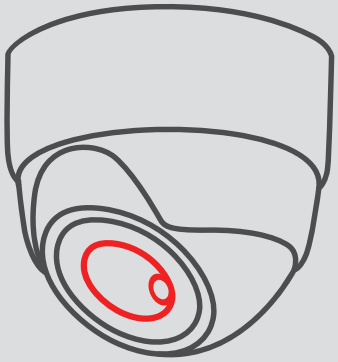

Turrets



CS-I4HS L-2.8mm



CS-I4XS LD-2.8mm



CS-I6XN L-2.8mm



CS-I5XS SD-2.8mm



CS-I8XS SD- 2.8mm



CS-I5XP S-2.8 mm



CS-I4SV S-2.8mm



CS-I5XQ I-2.8mm



CS-I8XQ I-2.8mm



CS-I86V I-180



CS-I8SS I-2.7-13.5mm

CASE
CANADA SECURITY



6 YEAR WARRANTY

CS-I4HS L-2.8mm

Value Series
Sharp Series
Intelligent Series

Image Sensor	4MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP66
Max. Resolution & Frame Rate	2688×1520@25fps
Wide Dynamic Range	Digital WDR
Housing	Metal+Plastic
Alarm I/O	N/A
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-30°C to 60°C, 0~95% RH
AI	Tripwire, Perimeter, Motion Detection

CASE
CANADA SECURITY



6 YEAR WARRANTY

Image Sensor	4MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	15m
Protection	IP67
Max. Resolution & Frame Rate	2560×1440@30fps
Wide Dynamic Range	TWDR
Housing	Metal+Plastic
Alarm I/O	N/A
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-30°C to 60°C, 0~95% RH
AI	Smart Alarm (Human & Vehicle Detection)

NightBright

CS-I4XS L-2.8mm

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY



6 YEAR WARRANTY

Image Sensor	6MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.001 Lux
White Light Distance	15m
Protection	IP66
Max. Resolution & Frame Rate	3200×1800@30fps
Wide Dynamic Range	WDR
Housing	Metal+Plastic
Alarm I/O	N/A
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-30°C to 60°C, 0~95% RH
AI	Smart Alarm (Human & Vehicle Detection)

NightBright

CS-I6XN L-2.8mm

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY







6 YEAR WARRANTY

Image Sensor	5MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	15m
Protection	IP67
Max. Resolution & Frame Rate	3072×1728@30fps
Wide Dynamic Range	120dB
Housing	Metal+Plastic
Alarm I/O	N/A
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-35°C to 65°C, 0~95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification

NightBright

CS-I5XS SD-2.8mm

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY







6 YEAR WARRANTY

CS-I8XS SD- 2.8mm

Value Series
Sharp Series
Intelligent Series

NightBright

Image Sensor	8MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	15m
Protection	IP67
Max. Resolution & Frame Rate	3840×2160@20fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	N/A
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-35°C to 65°C, 0~95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification

CASE
CANADA SECURITY



6 YEAR WARRANTY

Image Sensor	5MP
Lens	2.8mm Fixed
Max. IR Distance	N/A
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.0004 Lux
White Light Distance	15m
Protection	IP67
Max. Resolution & Frame Rate	3072×1728@20fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	N/A
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-35°C to 65°C, 0~95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification

NightBright

CS-I5XP S-2.8mm

Value Series
Sharp Series
Intelligent Series



Image Sensor	4MP
Lens	2.8mm Fixed
Max. IR Distance	N/A
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.0001 Lux
White Light Distance	10m
Protection	IP67
Max. Resolution & Frame Rate	2688×1520@25fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	N/A
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-40°C~65°C, 0~95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification

PhotonX

CS-I4SV S-2.8mm

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY







6 YEAR WARRANTY

CS-I5XQ I-2.8mm

Value Series | Sharp Series | Intelligent Series

	CS-I5XQ I-2.8mm	CS-I5XQ II-2.8mm
Image Sensor / Lens	5MP / 2.8mm Fixed	5MP / 2.8mm Fixed
Max. IR Distance	30m	50m
Audio I/O - Alarm I/O	1/1 - 1/1	1/1 - 1/1
Built-In Mic/Speaker	Yes / Yes	Yes / Yes
Min. Illumination	0.002 Lux	0.002 Lux
White Light Distance	15m	30m
Protection	IP66	IP66
Max. Resolution & Frame Rate	2880x1620@30fps	3072x1728@30fps
Wide Dynamic Range	120dB	120dB, True WDR (TWDR)
Housing	Metal	Metal
Memory Slot	512 GB	1 TB
Red & Blue Light	No	Yes
Face Detection / Capture	Up to 8 Faces / 4 Faces	Up to 32 Faces / 16 Faces
AI	Tripwire, Perimeter, Human & Vehicle Classification, Face Capture	Perimeter, Tripwire ,Double Tripwire, Object Abandon, Object Missing, Heatmap, Loitering, Running, Parking, People Counting, Crowd Detection, Helmet Detection, On Duty Detection, Visible Light Smoke & Fire Detection, Fire Exit Occupancy Detection, Face Capture, Human / Vehicle / Non-motor Vehicle / Pet Classification (Dog, Cat)

CASE
CANADA SECURITY







6 YEAR WARRANTY

CS-I8XQ I-2.8mm

	CS-I8XQ I-2.8mm	CS-I8XQ II-2.8mm
Image Sensor / Lens	8MP / 2.8mm Fixed	8MP / 2.8mm Fixed
Max. IR Distance	30m	50m
Audio I/O - Alarm I/O	1/1 - 1/1	1/1 - 1/1
Built-In Mic/Speaker	Yes / Yes	Yes / Yes
Min. Illumination	0.002 Lux	0.002 Lux
White Light Distance	15-20m	30m
Protection	IP66	IP66
Max. Resolution & Frame Rate	3840x2160@20fps	3840x2160@30fps
Wide Dynamic Range	120dB	120dB, True WDR (TWDR)
Housing	Metal	Metal
Memory Slot	512 GB	1 TB
Red & Blue Light	No	Yes
Face Detection / Capture	-	Up to 32 Faces / 16 Faces
AI	Tripwire, Perimeter, Human & Vehicle Classification	Perimeter, Tripwire ,Double Tripwire, Object Abandon, Object Missing, Heatmap, Loitering, Running, Parking, People Counting, Crowd Detection, Helmet Detection, On Duty Detection, Visible Light Smoke & Fire Detection, Fire Exit Occupancy Detection, Face Capture, Human / Vehicle / Non-motor Vehicle / Pet Classification (Dog, Cat)

NightBright

EW

Value Series

Sharp Series

Intelligent Series

CASE
CANADA SECURITY



6 YEAR WARRANTY

Image Sensor	8MP (4+4) Stitched
Lens	2.8mm Fixed
Max. IR Distance	30m
Audio I/O	1/1
Built-In Microphone	1×Built-in Mic
Built-In Speaker	1×Built-in Loudspeaker
Min. Illumination	0.0009 Lux
White Light Distance	30m
Protection	IP67
Max. Resolution & Frame Rate	4640×1728@25fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	1/1
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-35°C~65°C, 0~95% RH
AI	Human & Vehicle Classification, Tripwire, Perimeter, Video Abnormal, Audio Abnormal

PhotonX
EW
180°

CS-I86VI-180

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY




6 YEAR WARRANTY

CS-I8SS I-2.7-13.5mm

Value Series
Sharp Series
Intelligent Series

Image Sensor	8MP
Lens	2.7mm - 13.5 mm
Max. IR Distance	50m
Audio I/O	1/1
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP66
Max. Resolution & Frame Rate	3840×2160@30fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	2/1
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264/Motion JPEG
Operating Conditions	-40°C to 65°C, 0~95% RH
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Crowd Detection, People Counting, On Duty Detection, Video Abnormal, Audio Abnormal, Heatmap, Safety Helmet Detection, Human & Vehicle Classification

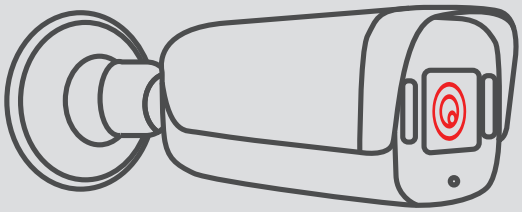

Bullets



CS-I8WS S-2.8mm



CS-I8WS SD-2.8mm



CS-I8WQ I-2.8mm



CS-I4UV S-4mm



CS-I85N L-180



CS-I82V I-180



CS-I4US L-2.8-12mm



CS-I8TSI-2.7-13.5mm

CASE
CANADA SECURITY



6 YEAR WARRANTY



CS-I8WS S-2.8mm

Value Series
Sharp Series
Intelligent Series

Image Sensor	8MP
Lens	2.8mm Fixed
Max. IR Distance	50m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	N/A
Protection	IP67
Max. Resolution & Frame Rate	3840x2160@20fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	N/A
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-40°C to 65°C, 0~95% RH
AI	Human & Vehicle Classification,Tripwire, Perimeter

CASE
CANADA SECURITY



6 YEAR WARRANTY



CS-I8WS SD-2.8mm

Value Series | Sharp Series | Intelligent Series

NightBright

Image Sensor	8MP
Lens	2.8mm Fixed
Max. IR Distance	50m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	15m
Protection	IP67
Max. Resolution & Frame Rate	3840×2160@20fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	N/A
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-35°C~65°C, 0~95% RH
AI	Human & Vehicle Classification, Tripwire, Perimeter

CASE
CANADA SECURITY



6 YEAR WARRANTY



Image Sensor	8MP
Lens	2.8mm Fixed
Max. IR Distance	50m
Audio I/O	1/1
Built-In Microphone	Yes
Built-In Speaker	Yes
Min. Illumination	0.002 Lux
White Light Distance	15m
Protection	IP67
Max. Resolution & Frame Rate	3840×2160@20fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	1/1
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-40°C to 65°C, 0~95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification

NightBright

EW

CS-I8WQ I-2.8mm

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY



6YEAR WARRANTY



Image Sensor	4MP
Lens	4mm Fixed
Max. IR Distance	N/A
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.0001 Lux
White Light Distance	15m
Protection	IP67
Max. Resolution & Frame Rate	2688×1520@30fps
Wide Dynamic Range	120dB
Housing	Metal
Alarm I/O	N/A
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-35°C to 65°C, 0~95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification

PhotonX

CS-I4UV S-4mm

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY



6 YEAR WARRANTY

Image Sensor	8MP (4+4) Non-Stitched
Lens	2.8mm Fixed
Max. IR Distance	50m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.02 Lux
White Light Distance	30m
Protection	IP67
Max. Resolution & Frame Rate	2560x1440@20fps
Wide Dynamic Range	DWDR
Housing	Plastic
Alarm I/O	N/A
Memory Slot	N/A
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-30°C~60°C, 0~95% RH
AI	Smart Alarm(Human & Vehicle Detection)

EW

180°

CS-I85N L-180

Value Series

Sharp Series

Intelligent Series

CASE
CANADA SECURITY



6 YEAR WARRANTY



Image Sensor	8MP (4+4) Stitched
Lens	2.8mm Fixed
Max. IR Distance	N/A
Audio I/O	1/1
Built-In Microphone	Yes
Built-In Speaker	Yes
Min. Illumination	0.0001 Lux
White Light Distance	15m
Protection	IP67
Max. Resolution & Frame Rate	4640x1728@25fps
Wide Dynamic Range	120dB
Housing	Metal + Plastic
Alarm I/O	1/1
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-40°C to 65°C, 0~95% RH
AI	Tripwire, Perimeter, Human & Vehicle Classification



CS-I82V I-180

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY



6 YEAR WARRANTY



CS-I4US L-2.8-12mm

Value Series
Sharp Series
Intelligent Series

Image Sensor	4MP
Lens	Motorized 2.8-12mm
Max. IR Distance	80m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
Protection	IP67
Max. Resolution & Frame Rate	2560×1440@30fps
Wide Dynamic Range	TWDR
Housing	Metal + Plastic
Alarm I/O	N/A
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-30°C to 60°C, 0~95% RH
AI	Smart Alarm(Human & Vehicle Detection)

CASE
CANADA SECURITY



6 YEAR WARRANTY

CS-I8TS/USI-2.7-13.5mm

Value Series
Sharp Series
Intelligent Series

Image Sensor	8MP
Lens	2.7mm - 13.5mm
Max. IR Distance	80m
Audio I/O	1/1
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.002 Lux
White Light Distance	30m (CS-I8US Only)
Protection	IP67
Max. Resolution & Frame Rate	3840×2160@30fps
Wide Dynamic Range	120dB,True WDR(TWDR)
Housing	Metal
Alarm I/O	2/1
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-35°C~65°C, 0~95% RH
AI	Human/Vehicle/Non-motor Vehicle/Pet(Cat、Dog) Classification, Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Missing, Heatmap, Loitering, Running, Parking, People Counting, Crowed Detection, Safety Helmet Detection, On Duty Detection, Video Abnormal, Audio Abnormal



Speed Domes



CS-P24S 23X



CS-P44S 25XA



CS-P66V 25XA-180



CS-P48 63X



CS-P88 44X



CS-P58 T-44X

CASE
CANADA SECURITY

3 YEAR WARRANTY



Megapixel	2MP
Lens / Zoom	5 - 115mm (23X)
Max. IR Distance	150m
Auto Tracking	N/A
Max. Resolution & Frame Rate	1920×1080@30fps
Built-In Microphone	N/A
Built-In Speaker	N/A
Audio I/O	N/A
Alarm I/O	N/A
Min. Illumination	0.001 Lux
Protection	IP66
Memory Slot	512 GB
Power	DC12V±10%/PoE+(IEEE802.3 at)+ e POE
Operating Conditions	-30°C to 65°C, 0~95% RH
AI	Human & Vehicle Classification, Tripwire, Double Tripwire, Perimeter, Object Abandon, Object missing, Heat map, Video Abnormal

CS-P24S 23X

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY

3 YEAR WARRANTY



CS-P44S 25XA

Value Series
Sharp Series
Intelligent Series

Megapixel	4MP
Lens / Zoom	4.8mm - 120mm (25X)
Max. IR Distance	150m
Auto Tracking	Yes
Max. Resolution & Frame Rate	2560×1440@30fps
Built-In Microphone	N/A
Built-In Speaker	N/A
Audio I/O	1/1
Alarm I/O	1/1
Min. Illumination	0.001 Lux
Protection	IP66
Memory Slot	512 GB
Power	DC12V±10%/POE+(IEEE802.3 at)
Operating Conditions	-30°C to 65°C, 0~95% RH
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Heatmap, Crowd Detection, People Counting, On Duty Detection, Safety Helmet Detection,Video Abnormal, Audio Abnormal, Human & Vehicle Classification, Face Capture

CASE
CANADA SECURITY

3 YEAR WARRANTY



CS-P66V 25XA-180

Megapixel	Panorama: 6MP	PTZ: 4MP
Lens / Zoom	Panorama: 2.8mm	PTZ: 4.8-120mm (25X)
Max. IR Distance	150m	
Auto Tracking	Yes	
Max. Resolution & Frame Rate	Panorama: 3840×1568@30fps	
Built-In Speaker	Yes	
Audio I/O	1/1	
Alarm I/O	2/1	
Min. Illumination	Panorama: 0.0001 Lux, PTZ: 0.001 Lux	
Protection	IP66	
Memory Slot	512 GB	
Power	AC24V±25%; DC24V±10%; POE 802.3bt	
Operating Conditions	-30°C to 65°C, 0~95% RH	
AI	**Panorama AI:** Tripwire, Double Tripwire, Heatmap, Human & Vehicle Classification **PTZ AI:** Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Crowd Detection, People Counting, On Duty Detection, Video Abnormal, Audio Abnormal, Human & Vehicle Classification, Face Capture	



Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY

3 YEAR WARRANTY



CS-P48M 63X

Value Series
Sharp Series
Intelligent Series

Megapixel	4MP
Lens / Zoom	Motorized lens 5.7-359mm (63X)
Max. IR Distance	300m
Auto Tracking	Yes
Laser	Up to 500m
Max. Resolution & Frame Rate	2560x1440@30fps
Built-In Microphone	N/A
Built-In Speaker	Yes
Audio I/O	1/1
Alarm I/O	8/2
Min. Illumination	0.001 Lux
Protection	IP66, TVS 6000V Lightning Protection, Surge Protection and Voltage Transient Protection
Memory Slot	512 GB
Power	DC36V±25%, POE++(IEEE802. bt)
Operating Conditions	-40°C to 70°C (IR OFF), -40°C to 40°C (IR ON), 0-95%RH
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Heatmap, Crowd Detection, People Counting, On Duty Detection, Safety Helmet Detection,Video Abnormal, Audio Abnormal, Face Capture

CASE
CANADA SECURITY

3 YEAR WARRANTY



CS-P88M 44X

Megapixel	8MP
Lens / Zoom	Motorized lens 5.7-250mm (44X)
Max. IR Distance	300m
Auto Tracking	Yes
Laser	Up to 500m
Max. Resolution & Frame Rate	3840×2160@30fps
Built-In Microphone	N/A
Built-In Speaker	Yes
Audio I/O	1/1
Alarm I/O	8/2
Min. Illumination	0.001 Lux
Protection	IP66
Memory Slot	512 GB
Power	DC36V±25%/PoE++(IEEE802.3 bt)
Operating Conditions	-40°C to 70°C (IR OFF), -40°C to 40°C (IR ON), <95% RH
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Heatmap, Crowd Detection, People Counting, On Duty Detection, Safety Helmet Detection, Human & Vehicle Classification Face Capture



CASE
CANADA SECURITY


3 YEAR WARRANTY



CS-P58 T-44X

Value Series
Sharp Series
Intelligent Series

Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays
Thermal Resolution	384×288
Optical Resolution	Up to 3072×1728@30fps
Smart IR, IR Range	300m
Built-in Parts	Mic, Speaker, Automatic Wiper, Electronic Compass, GPS/BDS
Pixel Interval	17μm
Response Waveband	8μm~14μm
NETD	≤40mK@f/1.0
Min. Illumination	0.001Lux
Thermal FOV	Horizontal: 7.5°, Vertical: 5.6° (Fixed 50mm)
Fire Detection Distance	Fire(2mx2m) 3000m
Wide Dynamic Range	120dB
Focal Length	6mm~264mm
Optical Lens Video Analytics	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Heatmap, Video Abnormal, Crowd Detection, Audio Abnormal, Demographics (People Counting), On Duty Detection, Safety Helmet Detection, Auto-Tracking, Face Capture, Early Warning
Thermal Lens Video Analytics	Tripwire, Double Tripwire, Perimeter, Temperature Alarm, Fire / Smoke Detection
Operating Conditions	-40°C to 70°C(IR OFF), -40°C to 40°C(IR ON), 0-95%RH
Protection	IP66, Lightning Protection, Surge Protection and Voltage Transient Protection meets EN 55035:2017

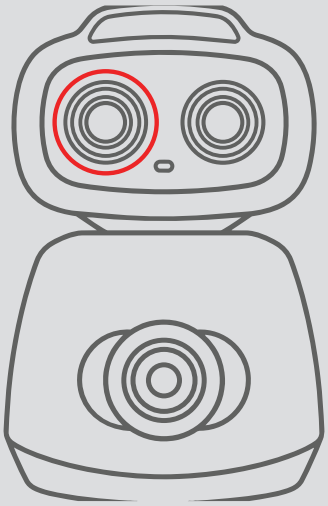

Consumer Cameras



CS-CI4 Window-wifi



CS-I4CN L-WIFI-2.8mm



CS-CP12 Robo-wifi



CS-P33N WIFI-4mm



CS-P63N WIFI-4mm



CS-CP8 wifi



CS-CP12 Solar-wifi

CASE
CANADA SECURITY

3 YEAR WARRANTY







CS-CI4 Window-wifi

NightBright
EW
Wi-Fi

Value Series
Sharp Series
Intelligent Series

Image Sensor	4MP
Lens / Zoom	4mm Fixed
Max. IR Distance	30m
Wi-Fi Transmission Distance	Up tp 30m (based on actual environment)
Max. Resolution & Frame Rate	2560x1440@15fps
Built-In Microphone	Yes
Built-In Speaker	Yes
Audio I/O	N/A
Alarm I/O	N/A
Min. Illumination	0.0005 Lux
Protection	ESD6000V
Memory Slot	256 GB
Power	DC5V,USB type-C,Max.10W
Operating Conditions	-10°C to 45°C, 0~95% RH
AI	Smart Alarm (Human and Vehicle Detection)

CASE
CANADA SECURITY

3 YEAR WARRANTY





Wi-Fi

CS-I4CN L-WIFI-2.8mm

Value Series
Sharp Series
Intelligent Series

Image Sensor	4MP
Lens	2.8mm Fixed
Max. IR Distance	30m
Wi-Fi Transmission Distance	Up to 50m (based on actual environment)
Audio I/O, Alarm I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	Yes
Min. Illumination	0.02 Lux
White Light Distance	20m
Protection	IP65
Max. Resolution & Frame Rate	2560x1440@20fps
Wide Dynamic Range	DWDR
Housing	Plastic
Memory Slot	256 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-10°C to 50°C, 0~95% RH
battery capacity	5200mAh
AI	Smart Alarm, Support Human & Vehicle Classification

CASE
CANADA SECURITY

3 YEAR WARRANTY



CS-CP12 Robo-wifi



Image Sensor	4MP
Lens / Zoom	Fixed: 2.8mm / Motion: 4mm+6mm
Max. IR Distance	10m
Auto Tracking	Yes (Motion support)
Wi-Fi Transmission Distance	Up tp 30m (based on actual environment)
Max. Resolution & Frame Rate	2560×1440@12fps
Built-In Microphone	Yes
Built-In Speaker	Yes
Audio I/O	N/A
Alarm I/O	N/A
Min. Illumination	0.02 Lux
Protection	Surge500V; ESD6000V
Memory Slot	256 GB
Power	DC5V,USB type-C,Max.10W
Operating Conditions	-10°C to 45°C, 0~95% RH
AI	Smart Alarm (Human, Face Recognition, Electric Fence, Pet, Cry)

CASE
CANADA SECURITY

3 YEAR WARRANTY





CS-P33N WIFI-4mm

AUTO TRACKING

Wi-Fi

Value Series

Sharp Series

Intelligent Series

Image Sensor	3MP
Lens / Zoom	4mm Fixed
Max. IR Distance	50m
Auto Tracking	Yes
Wi-Fi Transmission Distance	Up to 30m (based on actual environment)
Max. Resolution & Frame Rate	2304×1296@20fps
Built-In Microphone	Yes
Built-In Speaker	Yes
Audio I/O	N/A
Alarm I/O	N/A
Min. Illumination	0.02 Lux
Protection	IP66
Memory Slot	512 GB
Power	DC12V±25%,Max. 12W
Operating Conditions	-30°C to 60°C, 0~95% RH
AI	Smart Alarm

CASE
CANADA SECURITY

3 YEAR WARRANTY



CS-P63N WIFI-4mm

AUTO TRACKING
EW
Wi-Fi

Image Sensor	6MP (3+3) Non-Stitched
Lens / Zoom	4mm Fixed
Max. IR Distance	50m
Auto Tracking	Yes
Wi-Fi Transmission Distance	Up tp 50m (based on actual environment)
Max. Resolution & Frame Rate	Panorama: 3MP, 2304x1296@15fps Detail: 3MP, 2304x1296@15fps
Built-In Microphone	Yes
Built-In Speaker	Yes
Audio I/O	N/A
Alarm I/O	N/A
Min. Illumination	0.02 Lux
Protection	IP66
Memory Slot	512 GB
Power	DC12V±25%, MAX. 13W
Operating Conditions	-30°C to 60°C, 0~95% RH
AI	Human & Vehicle Tracking

CASE
CANADA SECURITY

3 YEAR WARRANTY



Image Sensor	8MP (4+4) Non-Stitched
Lens / Zoom	4mm Fixed
Max. IR Distance	50m
Auto Tracking	Yes
Wi-Fi Transmission Distance	Up tp 50m (based on actual environment)
Max. Resolution & Frame Rate	Panorama: 4MP, 2560×1440@20fps Detail: 4MP, 2560×1440@20fps
Built-In Microphone	Yes
Built-In Speaker	Yes
Audio I/O	N/A
Alarm I/O	N/A
Min. Illumination	0.02 Lux
Protection	IP66
Memory Slot	256 GB
Power	DC12V±25%, MAX. 13W
Operating Conditions	-30°C to 60°C, 10~95% RH
AI	Human & Vehicle Tracking

AUTO TRACKING
EW
Wi-Fi

CS-CP8 wifi

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY


3 YEAR WARRANTY



CS-CP12 Solar-wifi

Image Sensor	4MP
Lens / Zoom	Panorama: 2.8mm, Detail: 6mm+12mm
Max. IR Distance	50m
Auto Tracking	Yes
Wi-Fi Transmission Distance	Up tp 50m (based on actual environment)
Max. Resolution & Frame Rate	2560×1440@12fps
Built-In Microphone	Yes
Built-In Speaker	Yes
Audio I/O	N/A
Alarm I/O	N/A
Min. Illumination	0.02 Lux
Protection	IP65
Memory Slot	256 GB
Power	DC5V,USB type-C,Charger Wattage>10W
Operating Conditions	-30°C to 60°C, 0~95% RH
AI	Smart Alarm (Human and Vehicle Detection)

AUTO TRACKING
Wi-Fi
EW

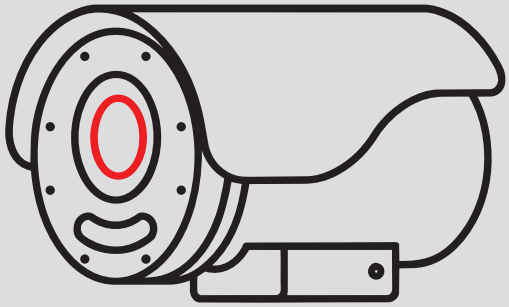

Special Cameras



CS-I5VN S-1.4mm



CS-I8RN S-2.8mm



CS-I2PN S-3.7mm



CS-VIK 27

CASE
CANADA SECURITY







6 YEAR WARRANTY

CS-I5VN S-1.4mm (Indoor)

Value Series
Sharp Series
Intelligent Series

Image Sensor	5MP
Lens	1.4mm Fixed
Max. IR Distance	30m
Audio I/O	1/1
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.02 Lux
White Light Distance	N/A
Protection	Indoor Usage
Max. Resolution & Frame Rate	2592×1944@30fps
Wide Dynamic Range	120dB
Housing	Metal+plastic
Alarm I/O	1/1
Memory Slot	512 GB
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Operating Conditions	-40°C~65°C, 0~95% RH
AI	Tripwire, Double Tripwire, Perimeter, Heatmap

CASE
CANADA SECURITY





6 YEAR WARRANTY

CS-I8RN S-2.8mm

Value Series
Sharp Series
Intelligent Series

Image Sensor	8MP (4+4) Non-Stitched
Lens	2.8mm Fixed
Max. IR Distance	50m
Audio I/O	N/A
Built-In Microphone	Yes
Built-In Speaker	N/A
Min. Illumination	0.02 Lux
White Light Distance	30m
Protection	IP67
Max. Resolution & Frame Rate	2560x1440@20fps
Wide Dynamic Range	DWDR
Housing	Plastic
Alarm I/O	N/A
Memory Slot	N/A
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Operating Conditions	-30°C~60°C, 0~95% RH
AI	Smart Alarm (Human & Vehicle Detection)

CASE
CANADA SECURITY



6 YEAR WARRANTY

CS-I2PN S-3.7mm

Value Series | Sharp Series | Intelligent Series

Megapixel	2MP
Lens Type / Zoom	Pinhole, 3.7mm Fixed
Image Sensor	1/2.8” Progressive Scan CMOS
Min. Illumination	0.01 Lux@(F2.0, AGC ON), B/W: 0.001 Lux(F2.0, AGC ON)
Max. Resolution	1080×1920
Wide Dynamic Range	True WDR
Iris	Fixed Iris
Max. Aperture	F2.0
Field of View (FOV)	H: 81.9°, V: 40.8°
Multi-Object Detection	Supports Face, Human & Vehicle Detection
Intelligent Analytics	Intrusion, Single Line Crossing, Double Line Crossing, Loitering, Wrong-Way Support Alarm Triggering By Specified Target Types (Human & Vehicle)
Streaming Capability	3 Streams
Interoperability	ONVIF (Profile S/T/G/M), SDK, CGI
Memory Slot	256 GB
Housing	Metal

CASE
CANADA SECURITY



6 YEAR WARRANTY

Outdoor Panel	
Camera	2MP
Viewing Angle	110° Horizontal / 127° Diagonal
RFID	13.56 MHz / 125 kHz
Relay	2 Outputs
Interface	Wiegand + RS485
Protection	IP65 / IK08
Operating Temperature	-40°C to +55°C
Indoor Monitor	
Display	7" TFT
Resolution	1024 × 600
Network	Wi-Fi + Ethernet
PoE	Yes
Storage	MicroSD Support
Alarm Zones	8
Languages	14+
Operating Temperature	-10°C to +55°C

CS-VIK 27

NVRs



CS-N105 P4



CS-N105 P4H-AI



CS-N110 P8



CS-N110 P8H-AI



CS-N220 P16H-AI



CS-N440 M-AI



CS-N440 P16H-AI



CS-N880 N



CS-N880 H-AI

CASE
CANADA SECURITY

6 YEAR WARRANTY



CS-N105 P4

Value Series
Sharp Series
Intelligent Series

IP Video Output	5CH
PoE Port	4
Bandwidth I/O	100Mbps / 80Mbps
Resolution	16MP
Display Ports	HDMI and VGA (simultaneous)
Storage	Up to 10 TB capacity for each HDD
Alarm I/O	1-ch,relay output,1A,24VDC
Ethernet port	4+1 RJ45, 10/100 Mbps self-adaptive

CASE
CANADA SECURITY

6 YEAR WARRANTY





CS-N105 P4H-AI

Value Series
Sharp Series
Intelligent Series

IP Video Output	5CH
PoE Port	4
Bandwidth I/O	100Mbps / 80Mbps
Resolution	16MP
Display Ports	HDMI and VGA outputs (Simultaneous)
Storage	Up to 10 TB capacity for each HDD
Alarm I/O	4-ch,TTL inputs,3mA,3.3VDC; 1-ch,relay output, 1A,24VDC
Ethernet Port	4+1 RJ45, 10/100 Mbps self-adaptive
AI by NVR	Face Detection, Face Recognition, Tripwire, Double Tripwire, Perimeter, Smart Motion Detection
VCA Search	Early-warning Search, Behavior Search, Safety Helmet Search, Thermographic Retrieval, Duty Search, Electric Bicycle Retrieval, Face Search (Search by face attributes), Smart Motion Detection

CASE
CANADA SECURITY

6 YEAR WARRANTY



IP Video Output	10CH
PoE Port	8
Bandwidth I/O	100Mbps / 80Mbps
Resolution	16MP
Display Ports	HDMI and VGA (simultaneous)
Storage	Up to 10 TB capacity for each HDD
Alarm I/O	1-ch,relay output,1A,24VDC
Ethernet port	8+1 RJ45,10/100 Mbps self-adaptive

CS-N110 P8

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY

6 YEAR WARRANTY






CS-N110 P8H-AI

Value Series
Sharp Series
Intelligent Series

IP Video Output	10CH
PoE Port	8
Bandwidth I/O	100Mbps / 80Mbps
Resolution	16MP
Display Ports	HDMI and VGA outputs (Simultaneous)
Storage	Up to 10 TB capacity for each HDD
Alarm I/O	4-ch, TTL inputs, 3mA, 3.3VDC, 1-ch, relay output, 1A, 24VDC
Ethernet Port	8+1 RJ45, 10/100 Mbps self-adaptive
AI by NVR	Face Detection, Face Recognition, Tripwire, Double Tripwire, Perimeter, Smart Motion Detection
VCA Search	Early-warning Search, Behavior Search, Safety Helmet Search, Thermographic Retrieval, Duty Search, Electric Bicycle Retrieval, Face Search (Search by face attributes), Smart Motion Detection

CASE
CANADA SECURITY

6 YEAR WARRANTY

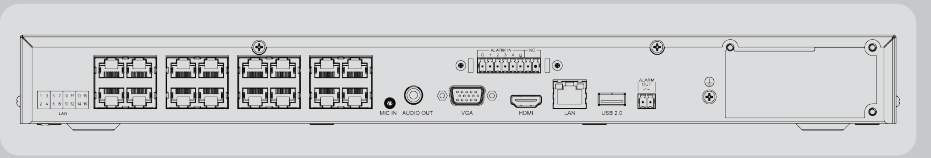




CS-N220 P16H-AI

Value Series | Sharp Series | Intelligent Series

IP Video Output	20CH
PoE Port	16
Bandwidth I/O	160Mbps (AI on: 120Mbps) / 80Mbps
Resolution	16MP
Display Ports	HDMI and VGA (Simultaneous)
Storage	Up to 10 TB Capacity for each HDD
Alarm I/O	4-ch, TTL inputs, 3mA, 3.3VDC, 1-ch, relay output, 1A, 24VDC
Ethernet Port	1×RJ-45, 10/100/1000 Mbps self-adaptive Ethernet port 16×RJ45, 10/100 Mbps self-adaptive
AI by NVR	Face Detection, Face Recognition, Tripwire, Double Tripwire, Perimeter, Smart Motion Detection
VCA Search	Early-warning Search, Behavior Search, Safety Helmet Search, Thermographic Retrieval, Duty Search, Electric Bicycle Retrieval, Face Search (Search by face attributes), Smart Motion Detection

CASE
CANADA SECURITY

6 YEAR WARRANTY

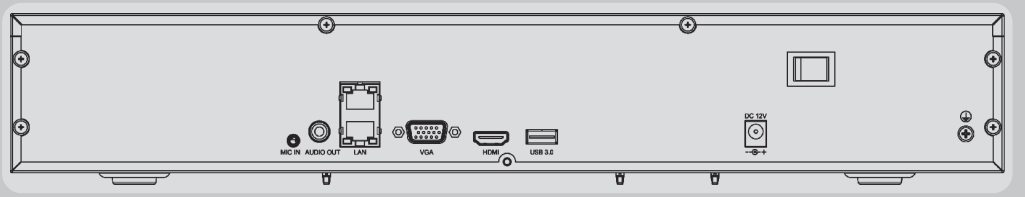




IP Video Output	40CH
PoE Port	N/A
Bandwidth I/O	400Mbps / 400Mbps (AI on: 200Mbps / 200Mbps)
Resolution	16MP
Display Ports	1xHDMI and 1xVGA (independent)
Storage	4x10TB HDD
Alarm I/O	N/A
Ethernet Port	2×RJ-45 10/100/1000 Mbps
AI by NVR	Face Detection, Face Recognition, Video Structuralization (excludes vehicle detection), Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Missing, Running, Parking, Heatmap, Sleeping on Duty Detection, On Duty Detection, Smart Motion Detection, Loitering
VCA Search	Heatmap, Early-warning Search, Behavior Search, Thermographic Retrieval, Duty Search, Electric Bicycle Retrieval, Face Search, Safety Helmet Search

CS-N440 M-AI

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY

6 YEAR WARRANTY

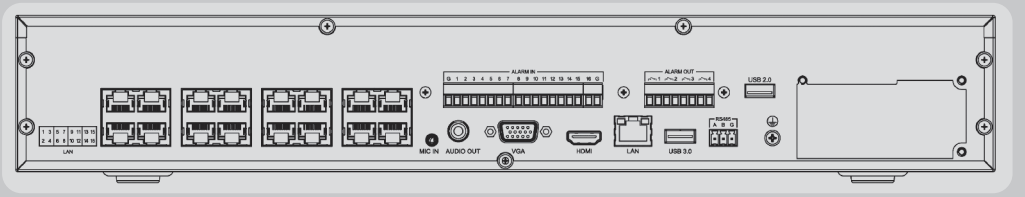




IP Video Output	40CH
PoE Port	16
Bandwidth I/O	400Mbps / 400Mbps (AI on: 200Mbps / 200Mbps)
Resolution	16MP
Display Ports	1xHDMI and 1xVGA (independent)
Storage	4x10TB HDD
Alarm I/O	16 Alarm Inputs / 4 Outputs
Ethernet Port	1×RJ45 10/100/1000 Mbps
AI by NVR	Face Detection, Face Recognition, Video Structuralization (excludes vehicle detection), Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Missing, Running, Parking, Heatmap, Sleeping on Duty Detection, On Duty Detection, Smart Motion Detection, Loitering
VCA Search	Heatmap, Early-warning Search, Behavior Search, Thermographic Retrieval, Duty Search, Electric Bicycle Retrieval, Face Search, Safety Helmet Search, License Plate Search Support

CS-N440 P16-H-AI

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY

6 YEAR WARRANTY

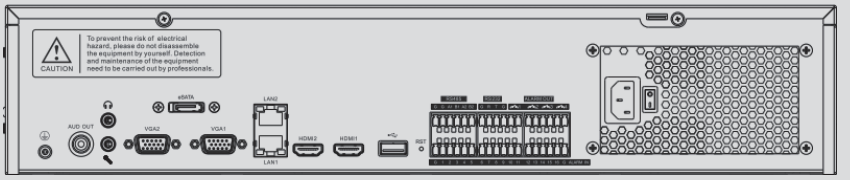




CS-N880 N

Value Series
Sharp Series
Intelligent Series

IP Video Output	80CH
PoE Port	N/A
Bandwidth I/O	640Mbps / 320Mbps
Resolution	16MP
Display Ports	HDMI1 and VGA1 - HDMI2 and VGA2 Independent Outputs
Storage	8x24TB HDD
Alarm I/O	16 Alarm Inputs / 4 Outputs
Ethernet port	2×RJ-45 10/100/1000 Mbps

CASE
CANADA SECURITY

6 YEAR WARRANTY

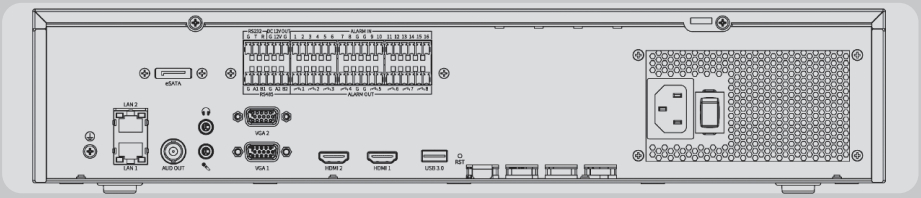



CS-N880 H-AI

Value Series
Sharp Series
Intelligent Series

IP Video Output	80CH
PoE Port	N/A
Bandwidth I/O	400Mbps / 400Mbps (AI on: 320Mbps / 200Mbps)
Resolution	16MP
Display Ports	HDMI1 and VGA1 - HDMI2 and VGA2 Independent Outputs
Storage	8x24TB HDD
Alarm I/O	16 Alarm Inputs / 4 Outputs
Ethernet Port	2×RJ-45 10/100/1000 Mbps
AI by NVR	Face Detection, Face Recognition, Video Structuralization (excludes vehicle detection), Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Missing, Running, Parking, Heatmap, Sleeping on Duty Detection, On Duty Detection, Smart Motion Detection, Loitering
VCA Search	Heatmap, Early-warning Search, Behavior Search, License Plate Search, Safety Helmet Search, Thermographic Retrieval, Duty Search, Electric Bicycle Retrieval, Face Search

CASE
CANADA SECURITY

Accessories



ACCESSORIES

SWITCHES







WALL MOUNTS



JUNCTION BOXES



CASE
CANADA SECURITY

6 YEAR WARRANTY



Ports	8×10/100M PoE + 2×10/100M uplink
PoE Standard	IEEE802.3af/at
Max PoE Power / Port	30W
Total PoE Budget	100W
Uplink Ports	2×10/100M RJ45
Transmission Distance	100m (Standard) / 250m (Extend Mode)
Input Voltage	AC100–240V, 50–60Hz, 2.2A
Power Consumption	<5W (Standby) / <100W (Full Load)
Dimensions (L×W×H)	195×130×40mm
Weight (Net / Gross)	0.75kg / 1.0kg
Operating Temperature	–20°C to +55°C
Humidity	5–90% RH (Non-condensing)
Installation	Desktop or wall-mount
Protection	4KV lightning / IP30
Certifications	CCC, CE, FCC, RoHS

CS-H1108PLS

CASE
CANADA SECURITY

6 YEAR WARRANTY



CS-POE33024PF

Ports	24×10/100/1000M RJ45 PoE Ports
PoE Standard	IEEE 802.3af/at
Max PoE Power / Port	30W
Total PoE Budget	400W / 600W
Uplink Ports	2×1000M SFP Fiber Ports
Power Consumption	Standby <25W, Full Load <380W / <600W
Input Voltage	AC 100–240V, 50/60Hz
Dimensions (L×W×H)	440×225×44mm / 440×290×44.5mm
Weight (Net / Gross)	3.0kg / 3.7kg or 3.2kg / 3.9kg
Operating Temperature	-20°C to +55°C
Humidity	5% ~ 90% RH Non-condensing
Installation	Desktop, Wall Mount, 1U/19” Rack Mount
Protection	4KV Lightning Protection, IP30
Certifications	CCC, CE, FCC Part 15 Class B, RoHS, CE/LVD EN62368-1

CASE
CANADA SECURITY

6 YEAR WARRANTY



Ports	8×10/100/1000M RJ45 PoE Ports
PoE Standard	IEEE 802.3af/at
Max PoE Power / Port	30W
Total PoE Budget	130W / 250W
Uplink Ports	2×1000M SFP Fiber Ports
Power Consumption	Standby<6W, Full load<120W / Standby<8W, Full load<240W
Input Voltage	AC 100–240V
Dimensions (L×W×H)	270×181×44.5mm
Weight (Net / Gross)	1.3kg / 1.8kg or 1.5kg / 2.0kg
Operating Temperature	-20°C to +55°C
Humidity	5% ~ 90% RH Non-condensing
Installation	Desktop, Wall Mount, 1U/19” Rack Mount
Protection	4KV Lightning Protection, IP30
Certifications	CCC, CE, FCC Part 15 Class B, RoHS, CE/LVD EN62368-1

CS-POE33108PF

CASE
CANADA SECURITY

6 YEAR WARRANTY



PoE injector

Ports	2×10/100/1000M RJ45 (Ethernet IN + PoE OUT)
PoE Standard	IEEE802.3af / IEEE802.3at
Max PoE Power / Port	15.4W (af) / 30W (at)
Total Power	18W (af) / 35W (at)
Network Medium	1000Base-T Cat5e or higher (≤100m)
Network Rate	10/100/1000Mbps
Thermal Protection	>100°C
Protection	IEC61000-4-2 (ESD) / Lightning protection
LED Indicator	PoE Working Status
Operating Temperature	–20°C to +55°C
Installation	Desktop or wall mount
Certifications	CE, FCC Part 15 Class B, RoHS

CS-PSE3301AC

CASE
CANADA SECURITY

6 YEAR WARRANTY



PoE splitter

Ports	1*10/100Base-TX RJ45 port (Data) 1*8P male output port (Data) 1*DC5521 power port (Power)
PoE Standard	IEEE802.3af/at
Max PoE Power/Port	13W
Total PoE Budget	≤100m (Cat5 or higher)
Uplink Ports	-
Input Voltage	44–57VDC (via PoE)
Output Voltage	12VDC ± 0.5V
Power Consumption	<1W standby / <13W full load
Dimensions (L×W×H)	85×31×26mm
Weight (Net / Gross)	<0.1kg / <0.15kg
Operating Temperature	–20°C to +55°C
Humidity	5% ~ 90% RH (Non-condensing)
Installation	Inline cable
Protection	4KV lightning / IP40
Certifications	CE, FCC, RoHS

CS-PD5202

Wall Mounts



CS-A25



CS-A28



CS-A29

Corner Mount



CS-A35

Pendant Mount



CS-DF21Y




Pole Mount



CS-A36

To see which accessories are compatible with each camera, please check the specification sheets.


Junction Box

		
CS-P54BM V5/V3.0	CS-P32EM	CS-A22
		
CS-P54BM V3	CS-P54AM V4	CS-P54BM V1

To see which accessories are compatible with each camera, please check the specification sheets.

CASE
CANADA SECURITY



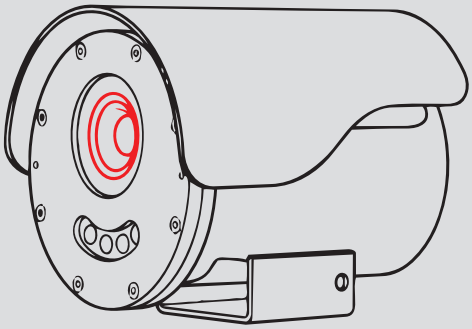

Explosion Proof Solutions



CSP-I8PS EX-I-2.7 13.5MM



CSP-I8MS EX I-2.7-13.5mm



CSP-I384 EXT I-7/13/25mm



CSP-P47S EX-63X



CSP-P49S EX-63X



CSP-P49S EXT-63X

CASE
CANADA SECURITY



6 YEAR WARRANTY

Model	CSP-I8PS EX-I-2.7-13.5mm
Image Sensor	8MP (3840×2160@20fps)
Lens	2.7mm - 13.5mm
Max. IR Distance	80m
Audio I/O	1/1
Built-In Microphone	Yes
Min. Illumination	0.01 Lux
Protection	IP66, IP68 (2m 2h), IP69
Wide Dynamic Range	120dB
Housing	Stainless Steel 304 or 316L
Alarm I/O	2/1
Video Compression	S+265/H.265/H.264 Motion JPEG
Certification	ATEX, IECEx certified
Explosion Proof Certification	DNV 22 ATEX 51565X, IECEx DNV 22.0097X
IECEx Explosion Proof Marking	Ex db IIC T6 Gb/Ex tb IIIC T80°C Db
ATEX Explosion Proof Marking	II 2 G Ex db IIC T6 Gb II 2 D Ex tb IIIC T80℃ Gb
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Crowd Detection, People Counting, On Duty Detection, Video Abnormal, Audio Abnormal, Heatmap, Safety Helmet Detection, Human & Vehicle Classification

AI
ISO 9001
IEC
IECEx
IP69

CSP-I8PS EX-I-2.7-13.5mm

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY



6 YEAR WARRANTY


CSP-I8MS EX I-2.7-13.5mm

Value Series
Sharp Series
Intelligent Series

Model	CSP-I8MS EX I-2.7-13.5mm
Image Sensor / Lens	8MP(3840×2160) / Motorized 2.7-13.5mm
Audio I/O - Alarm I/O	1/1 - 2/1
Protection	IP66, IP68 (2m, 2h)
Housing	Stainless Steel 304, 316L
Certifications	ATEX, IECEx Certified
Explosion proof certification	DNV 21 ATEX 24764X, IECEx DNV 21.0047X
ATEX Explosion proof marking	Without optical fibre II 2 G Ex db IIC T6 Gb II 2 D Ex tb IIIC T80°C Db With optical fibre II 2 G Ex db op pr IIC T6 Gb II 2 D Ex tb op pr IIIC T80°C Db
IECEx Explosion proof marking	With optical fibre: Ex db op pr IIC T6 Gb Ex tb op pr IIIC T80°C Db Without optical fibre: Ex db IIC T6 Gb, Ex tb IIIC T80°C Db
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Crowd Detection, People Counting, On Duty Detection, Video Abnormal, Audio Abnormal, Heatmap, Safety Helmet Detection, Human & Vehicle Classification

IP68

CASE
CANADA SECURITY

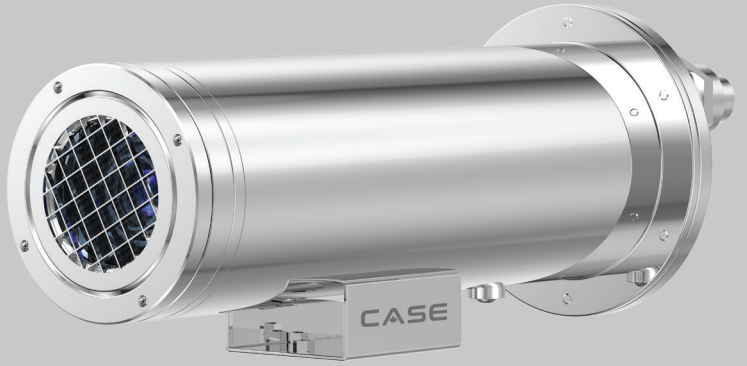

6 YEAR WARRANTY

Model	CSP-I384 EXT I-7/13/25mm
Image Sensor	384×288 VOx Thermal
Thermal Lens	7 mm / 13 mm / 25 mm
Pixel Pitch	17μm
NETD	≤40mK
Temperature Measurement	-20°C ~ +150°C / 0°C ~ +550°C
Explosion Protection	ATEX & IECEx Certified
Hazardous Area Rating	Gas Zone 1 & 2 / Dust Zone 21 & 22
Housing Material	Stainless Steel 304 / 316L
Protection	IP66 / IP68(2m/2h) / IP69
Defroster & Wiper	Intelligent Defroster + High-Precision Wiper
Power Input	12VDC / 24V AC/DC / 100–240VAC / PoE++
Operating Conditions	-40°C ~ +60°C

CSP-I384 EXT I-7/13/25mm

ISO 9001
IEC
IECEx
IP68

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY



3YEAR WARRANTY

Model	CSP-P47S EX-63X
Image Sensor	4MP (2560x1440@30fps)
Lens	Motorized lens 5.7-359mm (63X)
Max. IR Distance	300m
Audio I/O	1/1
Alarm I/O	8/2
Video Compression	S+265/H.265/H.264 (High profile, Main profile, Baseline)
Protection	IP68
Housing	Stainless Steel 304, 316L
Certificate Mark	CE 2460 Ex II 2G Ex db IIC T6 Gb or Ex db IIC T6 Gb CE 2460 Ex II 2D Ex tb IIIC T80 °C Db or Ex tb op pr IIIC T80 °C Db
Standards	EN60079-0:2012+A11:2013, EN60079-1:2014, EN60079-31:2014, IEC60079-0:2017, IEC60079-1:2014, IEC60079-31:2013
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Heatmap, Crowd, People Counting, On Duty Detection, Safety Helmet Detection, Video Abnormal, Audio Abnormal

AI

Ex

IECEx

IP68

CSP-P47S EX-63X

Value Series

Sharp Series

Intelligent Series

CASE
CANADA SECURITY



3 YEAR WARRANTY

Model	CSP-P49S EX-63X
Image Sensor	4MP (2560x1440@30fps)
Lens	Motorized lens 5.7-359mm (63X)
Max. IR Distance	300m
Audio I/O	1/1
Alarm I/O	8/2
Video Compression	S+265/H.265/H.264 (High profile, Main profile, Baseline)
Built-In Microphone	N/A
Min. Illumination	0.001 Lux
Protection	IP68 (2m/ 2H)
Housing	Stainless Steel 304 or 316L
Certification	Presafe 17 ATEX 11328X, IECEx PRE 18.0030X
Standards	IEC/EN60079
ATEX Explosion Proof Marking	CE 2460 Ⅱ2G Ex db op is ⅡC T6 Gb, Ⅱ2D Ex tb op is ⅢC T80 °C Db
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Heatmap, Crowd, People Counting, On Duty Detection, Safety Helmet Detection, Video Abnormal, Audio Abnormal

AI
ISO 9001
IEC
IECEx
IP68

CSP-P49S EX-63X

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY



3 YEAR WARRANTY

Model	CSP-P49S EXT-63X
Image Sensor	4MP (2560x1440@30fps)
Lens	Motorized lens 5.7-359mm (63X)
Max. IR Distance	300m
Audio I/O	1/1
Alarm I/O	8/2
Video Compression	S+265/H.265/H.264 (High profile, Main profile, Baseline)
Thermal Sensor	Uncooled microbolometer FPA (Amorphous Silicon)
Thermal Resolution	640x480
Pixel Interval	17μm
Protection	IP68 (1.2m/45min)
Housing	Stainless Steel 304 or 316L
Standards	IEC/EN60079
ATEX Explosion Proof Marking	II2GExdbIICT6Gb, II2DExtbIIICT80°Db
AI	Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Heatmap, Crowd, People Counting, On Duty Detection, Safety Helmet Detection, Video Abnormal, Audio Abnormal

AI

ISO 9001

IEC

IECEx


IP68

CSP-P49S EXT-63X


Value Series

Sharp Series

Intelligent Series



Explosion Proof Solutions (Accessories)



CSP-100



CSP-10L EX



CSP-HC EX-A/W




CSP-HC EX-W



CSP-300 EX




CSP-110 EX



CSP-600WB



CSP-FT EX




CSP-G EX



CSP-600CB



CSP-600PMB

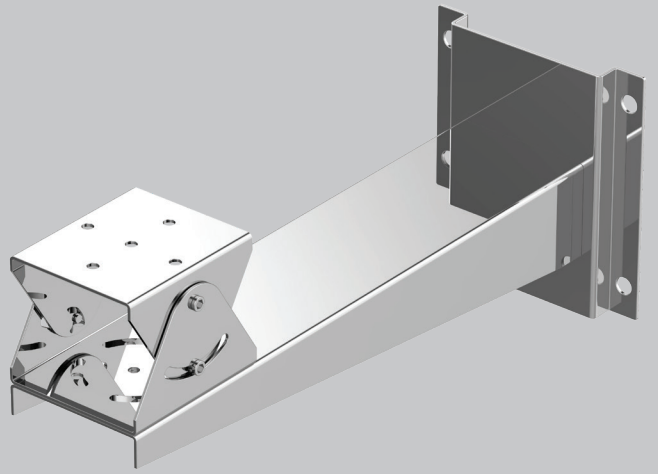

Model	CSP-100
Material	Stainless Steel 304, Stainless Steel 316L
With Mount adapter	Yes
Net weight	2.3kg


CSP-100



Model	CSP-10L EX
Tank capacity	4L, 6L, 8L, 10L, 12L
Certificate	ATEX, IECEx Certified
Material	Stainless Steel 304, 316L
OperatingVoltage	12VDC/24VDC/24VAC/110VAC/120VAC/220VAC/240VAC
Control way	By Solenoid Valve
Operation temperature	-20~60°C (Depends On Washing Agent)
Net weight	25kg (10L)



Model	CSP-HC EX-A/W
Certificate	CNEX
Material	Stainless Steel 304/316L
Cooling way	Air/ Water
Air cooling heat resist	-15 to 150°C
Water cooling heat resist	0 to 250°C
Power input	AC100V ~ AC240V or AC24V
Inner usable space	260×75×75mm
Net weight	9.1kg

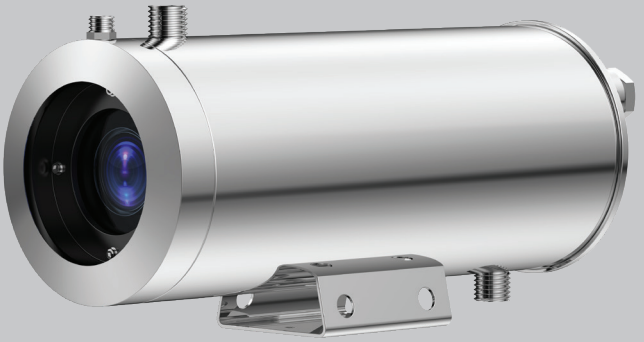

Model	CSP-HC EX-W
Material	Stainless Steel 304
Cooling way	Water
Window clean	Air Flow
Water cooling heat resist	0 to 250°C
Power input	AC100V – AC240V or AC24V
Inner usable space	260×80×80mm
Net weight	5 kg

CSP-HC EX-W




Model	CSP-300 EX
Ex Marking	II 2 G Ex db IIC T6 Gb II 2 D Ex tb IIIC T80°C Db
Certificate	Presafe 17 ATEX 11327X, IECEx PRE 18.0010X
Material	Stainless Steel 304 or 316L
Surface	Optional High-Polished
Ingress Protection	IP66, IP68 (2 m / 2 h), IP69
Cable Outlet	4 pcs M25×1.5, M27 × 1.25
Ambient Temperature	−40°C to +60°C
Air Pressure	80 kPa to 110 kPa
Relative Humidity	≤95% (no condensation, 25°C)
Inner Usable Size	230(L)×230(W)×120(H)mm
Overall Dimension	413(L)×397(W)×183(H)mm
Net Weight	13.2 kg

CSP-300 EX




Model	CSP-110 EX
Ex Marking	II 2G Ex db IIC T6 Gb II 2G Ex db op pr IIC T6 Gb II 2D Ex tb IIIC T80°C Db II 2D Ex tb op pr IIIC T80°C Db
Certificate	ATEX, IECEx
Material	Stainless Steel 304 or 316L
Surface	Optional High-Polished
Ingress Protection	IP66, IP68, IP69
Cable Outlet	4 × M25 / G3/4 / NPT3/4
Voltage	AC100–240V / DC24V / AC24V / DC12V / PoE++ (48VDC)
Ambient Temperature	-40°C to +60°C
Air Pressure	80 kPa to 110 kPa
Relative Humidity	≤95% (no condensation, 25°C)
Overall Dimension	187(L)×187(W)×84(H) mm
Net Weight	3.1 kg

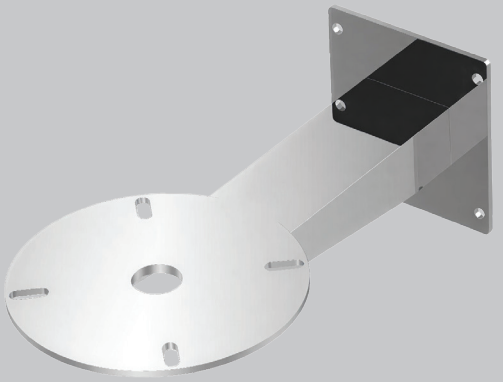


Model	CSP-600WB
Material	Stainless Steel 304, Stainless Steel 316L
Net weight	6.5 kg

CSP-600WB

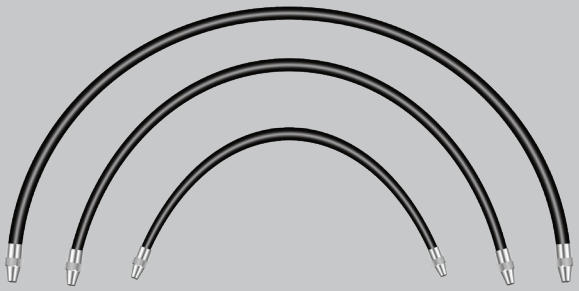

Model	CSP-FT EX
Certificate	ATEX, IECEx Certified
Ex Marking	Ex II 2 G Ex eb IIC Gb Ex II 2 D Ex tb IIIC Db
Material	Carbon Steel or Stainless Steel 304 or 316L
Connector	G3/4, M25*1.5, M27*1.25
Size	Ø16*1000mm, Ø16*1500mm, Ø16*2000mm, Ø20*1000mm, Ø20*1500mm, Ø20*2000mm

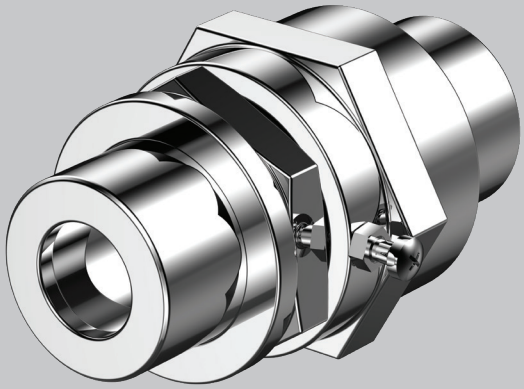


Model	CSP-G EX
Certificate / Ex Marking	Ex II 2G Ex db IIC Gb Ex II 2D Ex tb IIIC Db
Material	Stainless Steel 304/316L
Ingress protection	IP68
Connector	M20×1.25, M25×1.5, M27×1.25, M32×1.25




Model	CSP-600CB
Material	Stainless Steel 304 or 316L
Maximum Loading	100Kg
Flexible Joint	Yes
Max Loading	100kg
Net Weight	5.4kg
Gross Weight	6kg
Overall dimension	326×184×180mm

CSP-600CB

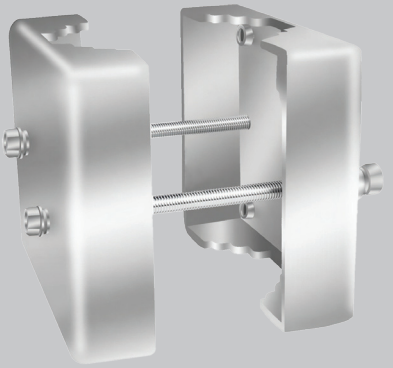

Model	CSP-600PMB
Material	Stainless Steel 304 or 316L
Maximum Loading	100Kg
Flexible Joint	Yes
Max Loading	100kg
Net Weight	6.6kg
Gross Weight	7.1kg
Overall dimension	280×182×202mm

CSP-600PMB

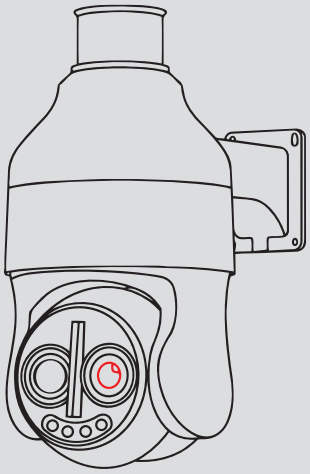

Thermal Solutions



CS-I5LQ I-T-4mm



CSP-I640R IT-13/19/25



CSP-I640R IT-35-55-75



CSP-P6409 IT-360



CSP-I1280R IU-75mm



CSP-I1280R4 IZ-350/1200mm

CASE
CANADA SECURITY



6 YEAR WARRANTY



Image Sensor	Optical: 2880x1620@30fps, Thermal: 256×192@25fps Vanadium Oxide Uncooled Focal Plane Arrays
Pixel Interval	12μm
Temperature Detection	-15.0°~150.0°, 50.0°~550.0°, Auto
NETD	≤ 45 mK (@ 25°C, F# = 1.0)
Min. Illumination	0.002 Lux
FOV	Horizontal FOV:88.7°, Vertical FOV:46.8°, Diagonal FOV:102°
Measurement Accuracy	Max. (± 2°C, ± 2%)
Wide Dynamic Range	120 dB
Focal Length	Visible Light: 4mm, Thermal: 3.2mm
Video Analytics	Tripwire, Double Tripwire, Perimeter, Video Abnormal, Audio Abnormal, Human & Vehicle Classification
Operation Conditions	-35°C to 65°C, 0~95% RH
Protection	IP67

EW

AI

CS-I5LQ I-T-4mm

Value Series

Sharp Series

Intelligent Series



6 YEAR WARRANTY

Model	CSP-I640R IT-13/19/25
Image Sensor	VOx Uncooled FPA Detector, Resolution 640×512
Visible Lens	-
Thermal Lens	9.1mm / 13 mm / 19 mm / 25 mm (Athermal Fixed Focus, F/1.0)
Pixel Pitch	12 μm
Field of View	9.1mm: 48°×38° 13mm: 32.9°×26.6° 19mm: 22.9°×18.4° 25mm: 17.5°×14.0°
Detection Distance	Vehicle: 1163m/1661m/2428m/3194m Human: 379m(9.1mm)/542m(13 mm)/792m(19 mm)/1042m(25 mm)
Video Analytics	Tripwire Intrusion, Area Intrusion, Fire Detection, Smart Temperature Measurement, Alarm Linkage
Storage	MicroSD Card, up to 256 GB
Operating Conditions	–40°C to +70°C, 0~95% RH
Protection	IP66

CSP-I640R IT-13/19/25

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY



6 YEAR WARRANTY

CSP-I640R IT-35-55-75

Value Series
Sharp Series
Intelligent Series

Model	CSP-I640R IT-35/55/75
Image Sensor	VOx Uncooled FPA Detector, Resolution 640×512
Visible Lens	-
Thermal Lens	35 mm / 55 mm / 75 mm (Athermal Fixed Focus, F/1.0)
Pixel Pitch	12 μm
Field of View	35mm: 12.5°×10° 55mm: 8.0°×6.4° 75mm: 5.9°×4.7°
Detection Distance	Vehicle: 4472m/7028m/9583m Human: 1458m(35 mm)/2291m(55mm)/3125m(75mm)
Video Analytics	Tripwire Intrusion, Area Intrusion, Fire Detection, Smart Temperature Measurement, Alarm Linkage
Storage	MicroSD Card, up to 256 GB
Operating Conditions	−40°C to +60°C, 0~95% RH
Protection	IP66

CASE
CANADA SECURITY





3 YEAR WARRANTY

Model	CSP-P6409 IT-360
Image Sensor	4MP Visible + 640×512 Thermal + 13440×512 Panoramic Thermal
Visible Lens	6.5–260mm Motorized Zoom
Thermal Lens	50mm
Panoramic Lens	25mm
Pixel Pitch	12μm
Field of View	360°× 14° (Panoramic)
Detection Distance	Vehicle: 4.47km / Human: 1.46km
Video Analytics	Human & Vehicle Classification, Line Crossing, Region Intrusion
PTZ	360° Pan / -27° ~ +90° Tilt
Storage	Micro SD up to 256GB
Operating Conditions	-40°C to +70°C
Protection	IP66

CSP-P6409 IT-360

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY





6 YEAR WARRANTY

Model	CSP-I1280R IU-75mm
Image Sensor	1280×1024 Thermal
Visible Lens	-
Thermal Lens	75mm Fixed
Pixel Pitch	12μm
NETD	≤35mK
Field of View	360°×9.4°
Detection Distance	Vehicle: 9.5km / Human: 3km
Video Analytics	Tripwire, Regional Intrusion
Smart Recognition	Human, Vehicle, Vessel, Bird & UAV
PTZ	-
Storage	Micro SD up to 1TB
Operating Conditions	-40°C to +60°C
Protection	IP66

CSP-I1280R IU-75mm

Value Series
Sharp Series
Intelligent Series

CASE
CANADA SECURITY




6 YEAR WARRANTY

CSP-I1280R4 IZ-350/1200mm

Value Series
Sharp Series
Intelligent Series

Model	CSP-I1280R4 IZ-350/1200mm
Image Sensor	4MP Visible + 1280×1024 Thermal
Visible Lens	20–1200mm
Thermal Lens	35–350mm
Pixel Pitch	12μm
NETD	≤40mK
Field of View	Visible: 22.1°x12.6°~0.37°x0.2° Thermal: 22.1°x12.6°~0.37°x0.21°
Detection Distance	Vehicle: 44.7km / Human: 14.6km
Video Analytics	Tripwire, Intrusion, Fire & Smoke Detection
Smart Recognition	Human, Vehicle, Ship, UAV & Aircraft
PTZ	360° Pan / ±90° Tilt
Storage	Micro SD up to 1TB
Operating Conditions	-40°C to +70°C
Protection	IP66

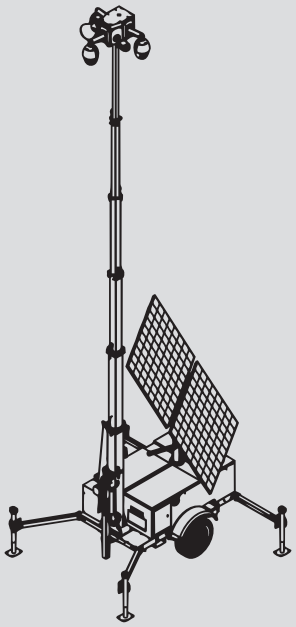

Solar Trailers



CSP-S2560H4L



CSP-S6000H7GW



CSP-S12000H9GWH

CASE
CANADA SECURITY



2YEAR WARRANTY

Model	CSP-S2560H4L
Solar Panel	1×450W Bifacial
Panel Adjustment	90°tiltable, 180°rotatable
MPPT Controller	20A-E
Battery Type	LFP
Battery Capacity	2560Wh
AC Charger	NO
Available Voltage	24V/48V
Estimated Charging Time	4.8 hours
Running Time	72 hours on 28W
8-Port POE	NO
Optional Accessories	POE, 4G Router,NVR, Cameras
Mast & Height	3.5M, Hot-Dip Galvanized
Mast Lifting	Manual Winch
Base	Hollow,Metal, Hot-Dip Galvanized
Lifting Ring	4×
Forklift Holes	2×
Extended Dimensions	1134×1100×5221.5mm
Retracted Dimensions	1134×1100×3157.5mm
Weight	360KG
QTY in 20' / 40' Container	12 units / 28 units

CSP-S2560H4L

CASE
CANADA SECURITY



2YEAR WARRANTY

Model	CSP-S6000H7GW
Solar Panel	1×720W, Bifacial
Panel Rotating	0°-60° Manual
Panel Tilting	30°-60° Manual
MPPT Controller	30A-E
Estimated Solar Charging Time	7 hours
Battery Type	GEL
Battery Capacity	6000WH
Battery AC Charger	1.5kW, AC110V/230V
System Voltage	DC24V
Available Voltage	DC 24V, 48V
DC-to-AC Inverter	NO
Battery Backup Time	72 Hours Under 66W Load
Mast Height	6.5M
Lifting Winch	Manual
Material	Hot-dip Galvanized Steel
Feature	Build in Wiring
CCTV BOX	350° Rotatable, 6-sided, back-opened
Strobe Light	Blue&White
Optional accessories	Cameras, NVR, 4G Router, Loud Speaker
Working Temp	-20°C~55°C
Extended Dimensions	2384×1800×7000mm
Retracted Dimensions	2384×1800×3000mm
Gross Weight	900KG
QTY in 20' / 40'	8 units / 16 units

CSP-S6000H7GW


CASE
CANADA SECURITY



2YEAR WARRANTY

Model	CSP-S12000H9GWH
Solar Panel	2×600W, Bifacial
Panel Rotating	180° Manual
Panel Tilting	30°-60° Electrical
MPPT Controller	45A-V With Remote Battery Monitoring
Estimated Solar Charging Time	10 hours
Battery Type	GEL
Battery Capacity	12000WH
Battery AC Charger	1.5kW, AC110V/230V
System Voltage	DC 24V
Available Voltage	DC 24V, 48V
DC-to-AC Inverter	450W Rated
Battery Backup Time	72 Hours Under 133W Load
Mast Height	8.5M
Lifting Winch	Electrical
Material	Hot-dip Galvanized Steel
Feature	Build in Wiring
CCTV BOX	350° Rotatable, 6-sided, back-opened
Strobe Light	Blue&White
Included Accessories	8-Port POE Switch
Optional Accessories	Cameras, NVR, 4G Router, Loud Speaker
Working Temp	-20°C~55°C
Extended Dimensions	4037×3246×9350mm
Retracted Dimensions	4037×1630×3100mm
Gross Weight	1100KG
QTY in 20' / 40'	6 units / 14 units

CSP-S12000H9GWH

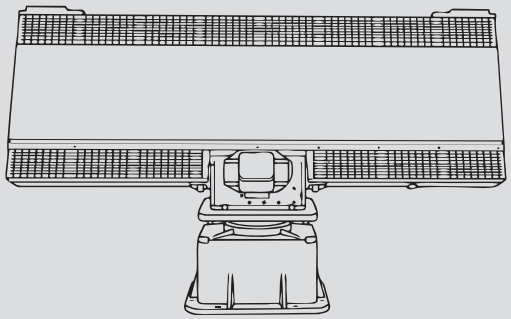

Radars



CSP-RX3R-10K



CSP-RC2S-6K

CASE
CANADA SECURITY

3 YEAR WARRANTY



Model	CSP-RX3R-10K
System Type	Phased Array with Mechanical Azimuth Scanning and Electronic Elevation Scanning / Pulse Doppler
Band	X-band
Effective Detection Range	100m～8km(human), 100m～10km(vehicle)
Azimuth Coverage	360°
Elevation Coverage	≥40°
Velocity Measurement	0.5m/s～75m/s
Azimuth Accuracy	≤0.5°
Elevation Accuracy	≤1.0°
Range Accuracy	≤10m
Data Rate	≥2Hz
Interface	1×100M RJ45 Ethernet Port
Power	110~240 V
Power Consumption	≤400W
Data Rate	-40°C～+55°C
Interface	≤32kg

CSP-RX3R-10K

CASE
CANADA SECURITY


3 YEAR WARRANTY



Model	CSP-RC2S-6K
System Type	Phased Array System (Azimuth Phase Scanning)/Pulse Doppler
Band	C-band
Range	6km
Effective Detection Range	100m～4.0km(Human), 100m～6.0km(Vehicle)
Azimuth Coverage	≥90°
Elevation Coverage	≥9°
Velocity Measurement	0.5m/s～30m/s
Azimuth Accuracy	≤1.0°
Range Accuracy	≤10m
Data Rate	≥2Hz
Interface	1×100M RJ45 Ethernet Port
Power	110~240 V
Power Consumption	≤60W
Data Rate	-40°C～+55°C
Interface	5.5kg (≤15kg with PT-unit)

CSP-RC2S-6K


Software
CASE

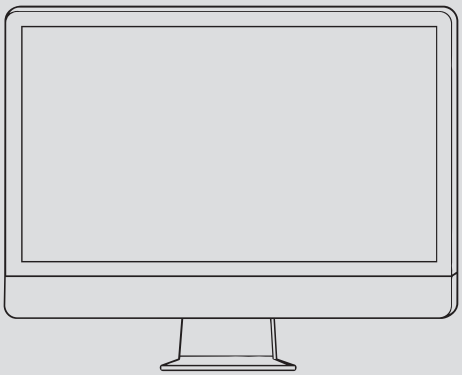

Software



CASE Station



CASE Connect



CASE Cloud




Easy-to-Use VMS for Monitoring, Playback, and Video Management

- No Per-Camera Licensing
- Simple, User-Friendly Operation
- Playback & Video Export
- Monitor Cameras Across Multiple Sites in One Interface

CASE Station

macOS

Windows

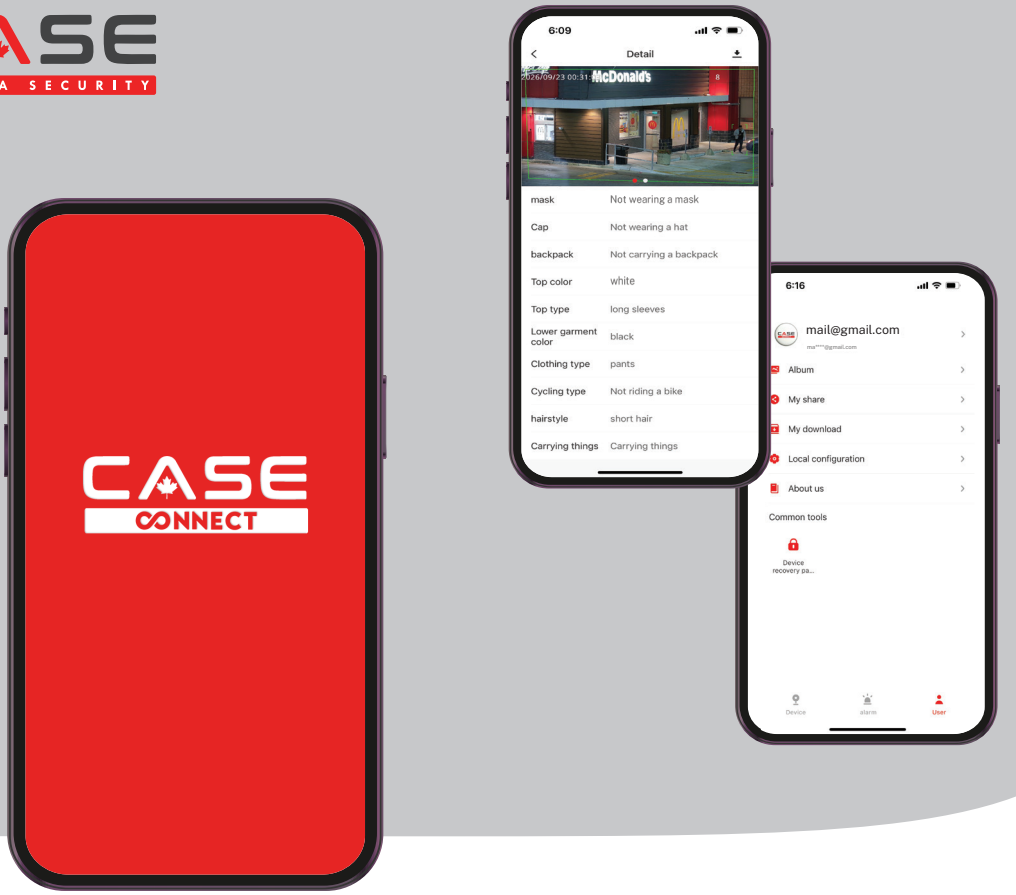

CASE Connect provides centralized device management, monitoring, and alarm information in a single interface, making everyday surveillance operations easier and more organized.

- Device List & Preview
- Device Sorting & Management
- Device Sharing
- Live View & Playback
- Alarm Information & Details
- Alarm Type & Event Time

iOS

Android

CASE Connect



Remote NVR Configuration & Troubleshooting

Configure and troubleshoot NVRs remotely without the need to be on-site.

- **Reduce Site Visits** – Configure and troubleshoot remotely, saving time and reducing technician call-outs.
- **Secure P2P Connection** – No port forwarding required.
- **No Additional Cost** – Convenient remote access with no extra fees.

CASE Cloud

cloud.case.cam

Software

To ensure seamless connectivity and effective management of your CASE security systems, we have developed customized software for both personal computers and mobile devices. Our applications are compatible with macOS and Windows operating systems for PCs, and Android and iOS for mobile devices. By installing these tools, named CASE Station for PCs and CASE Connect for mobile devices, you will be able to view camera footage and manage your systems.

CASE Cloud Config provides remote access to NVR web interfaces through a secure P2P connection, allowing technicians to configure and troubleshoot systems without being on site. It helps reduce unnecessary service visits and saves time when changes can be made remotely. No port forwarding or additional service fees are required.

In addition, we provide the Search Config Tool, a practical utility designed to help you locate cameras and NVRs on your network, add them, and configure their settings. This tool also includes a storage calculator, estimate the storage requirements based on the number of cameras and resolution, thereby streamlining your project planning.

CASE Station — macOS | Windows

CASE Connect — iOS | Android

CASE Cloud — cloud.case.cam

CASE Setup Tool — macOS | Windows

CASE
CANADA SECURITY

Information





LASER TRACKING

CASE PTZ cameras offer a unique third layer of defense with their optional laser beam feature. This advanced deterrent function enhances security by tracking intruders and intimidating them to prevent unauthorized access. It acts as an additional layer of protection, complementing the camera's warning flashlights and speaker system. The laser beam is visible to the human eye but is designed to be eye-safe, ensuring it provides effective deterrence without causing harm.




PANORAMIC VIEW

CASE dual lens 180-degree cameras provide an expansive and seamless panoramic view, capturing wide areas with remarkable clarity. By utilizing two lenses, these cameras stitch together a continuous 180-degree field of vision, eliminating blind spots and offering superior coverage compared to traditional single-lens cameras. This technology is especially advantageous in large spaces like parking lots, warehouses, or public areas, reducing the need for multiple cameras and minimizing installation costs. The dual-lens system also enhances image quality across the entire field of view, ensuring no detail is missed. CASE dual lens 180-degree cameras deliver comprehensive and reliable surveillance with enhanced efficiency.



AUTO TRACKING

Several of our CASE Pan-Tilt-Zoom (PTZ) cameras come equipped with an Auto-Tracking feature. This advanced functionality enhances your security system by automatically tracking any potential intruder or trespasser on the property. Auto-Tracking ensures that you capture high-quality footage and provides continuous monitoring of the intruder's movements, allowing you to see their direction and actions in real time. This feature is crucial for improving situational awareness and response capabilities.



AI

CASE cameras are designed with advanced AI capabilities to enhance security and operational efficiency. They support essential features like line crossing and perimeter breach detection, ensuring timely alerts for unauthorized access. For more complex scenarios, the cameras offer cutting-edge AI analytics, including face capture, human and vehicle classification, and even safety helmet detection. These features make CASE Cameras an ideal solution for a wide range of applications, from basic surveillance to advanced safety and compliance monitoring.

THERMAL

CASE Thermal Cameras are equipped with thermal imaging technology that provides precise detection in complete darkness, harsh weather, or challenging environments where traditional cameras may fail. Their robust design ensures durability, while intelligent analytics, including human and vehicle classification, enhance security monitoring. Ideal for critical infrastructure, perimeter defense, and industrial applications, The CASE Thermal Cameras offers reliable performance and peace of mind.

NightBright

Combining a wide aperture with a large sensor, CASE NightBright captures significantly more light in low-light environments. Even in total darkness, cameras equipped with NightBright technology can capture vivid color images and reveal more detail in scenes with the help of warm light illumination. CASE NightBright technology makes it possible for the camera to achieve 24-hour full-color imaging.

EARLY WARNING

Powered by deep learning, Case EWarning combines light and audio warnings to achieve prevention, mid-way intervention, and post-event investigation. It can precisely differentiate between vehicles and people, and warn them respectively, increasing the accuracy and effectiveness of warnings compared to conventional motion-detection systems.

WIFI

CASE Wi-Fi cameras offer a flexible and efficient surveillance solution for both residential and commercial applications. Designed for easy installation, these cameras eliminate the need for extensive wiring while maintaining high-quality video performance. Equipped with advanced features like motion detection, remote viewing, and two-way audio, they provide comprehensive monitoring and real-time interaction. With robust encryption and reliable connectivity, CASE Wi-Fi cameras ensure secure and uninterrupted surveillance, making them an ideal choice for modern security needs.



© 2027 CASE Global Inc. All rights reserved.