CASE™
CANADA SECURITY

CS-P63N WIFI-4mm

6MP WIFI PT Camera



Sharp Series

3 Years WARRANTY

24/7 Support

KEY FEATURES

- Plastic housing
- Up to Panorama:3MP,2304×1296@15fps Detail:3MP, 2304×1296@15fps
- S+265/H.265/H.264B/H.264M/H.264H
- Color:0.02Lux@(F1.6,AGC ON),B/W:0Lux with IR
- IR range up to 50m
- Built-in Mic, Built-in Speaker
- Support microSD/microSDHC/microSDXC card,up to 512GB
- Operating conditions -30°C~60°C(-22°F~140°F), ⩽95%RH
- DC12V±25%,Max. 13W
- IP66

Email: sales@canadasecurity.com
Website: canadasecurity.com
US : +1 301 900 1000
CA : +1 289 800 9000

CASE™
CANADA SECURITY

SPECIFICATIONS


Camera	
Image Sensor	1/3"CMOS
Min. Illumination	Color:0.02Lux@(F1.6,AGC ON),B/W:0Lux with IR
Shutter Time	1s~1/100000s
Day&Night	IR-cut filter with auto switch (ICR)
Smart IR	Yes
WDR	DWDR
S/N	>40dB
Angle Adjustment	Panorama:-60~60°(P) Details:0~345°(P); Panorama:5~15° Details:-15~90°
Lens	
Lens Type	Fixed focal lens
Focal Length	4mm
Lens Mount	M12
Aperture Range	F1.6
Aperture Type	Fixed
Field of View	Panorama:81.3°(H) Detail:81.3°(H); Panorama:44.4°(V) Detail:44.4°(V); Panorama:94.4°(D) Detail:94.4°(D)
DORI Distance	Detect:59.26m Observe:23.52m Recognize:11.85m Identify:5.93m
Illuminator	
IR LEDs	Panorama:4 Detail:4
IR Distance	Up to 50m
Wavelength	850nm
White LEDs	Panorama:4 Detail:4
Whitelight Distance	15m
Red and Blue Alarm Flash	Yes
Compression Standard	
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Video Bit Rate	32k~4Mbps
Audio Compression	G.711A/G.711U
Audio Sampling Rate	8kHz/16kHz
Image	
Max. Resolution	Panorama:3MP,2304×1296@15fps Detail:3MP,2304×1296@15fps

Main Stream	Panorama: PAL:15fps(2304×1296, 1920×1080, 1280×720, 704x576, 640x480) NTSC:15fps(2304×1296, 1920×1080, 1280×720, 704x576, 640x480) Detail: PAL:15fps(2304×1296, 1920×1080, 1280×720, 704x576, 640x480) NTSC:15fps(2304×1296, 1920×1080, 1280×720, 704x576, 640x480)
Sub Stream	Panorama: PAL:15fps(704×576, 704×288, 640×360, 352×288) NTSC:15fps(704×480, 704×240, 640×360, 352×240) Detail: PAL:15fps(704×576, 704×288, 640×360, 352×288) NTSC:15fps(704×480, 704×240, 640×360, 352×240)
BLC	Yes
HLC	Yes
AGC	Yes
3D DNR	Yes
White Balance	Auto/Semi-Auto/Manual/Sunshine/Nature Light/Warmlight Lamp/Daylight Lamp/Filament Lamp/Lock White Balance
OSD	Overlay of additional characters in 1 regions, 1 line, with a maximum of 48 characters; 16*16/32*32/48*48
Privacy Mask	4 black static areas
Defog	Yes
Feature	
Exceptions Alarm	Voltage Alarm; Disk Full; Disk R/W Error; IP Address Conflict
Linkage Method	Trigger Sound; Trigger Recording; Trigger Capture; Notify Surveillance Center; Alarm Output
Auto-Tracking	Yes
Network	
ANR	Yes
Protocols	HTTP; TCP/IP; UDP; ICMP; DHCP; DNS; NTP; TLS v1.2; IPv4; SSH; Unicast; FTP
System Compatibility	SDK; CGI
Remote Connection	⩽2
Client	CASE Station
Moblie Client	CASE Connect
Web	IE10+; Firefox52+; Edge89+; Safari11+; Chrome57+
Wi-Fi	
Transmission Distance	Up tp 50m(based on actual environment)
Wireless Standard	IEEE802.11b/ 802.11g/802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	20/40MHz
Wi-Fi Security	WPA-PSK/WPA2-PSK
Interface	
Communication Interface	1*RJ-45 (10/100 Base-T)
Built-in Mic	Yes

Built-in Speaker	Yes
Reset Button	Yes
On-board Storage	Support microSD/microSDHC/microSDXC card,up to 512GB
General	
Web Client Language	2 languages English/Vietnamese
Operating Temperature	-30°C~60°C(-22°F~140°F)
Operating Humidity	≤95%RH
Storage Temperature	-30°C~60°C(-22°F~140°F)
Storage Humidity	10%~95%RH(non-condensing)
Power Supply	DC12V±25%,Max. 13W
Protection	Surge4000V; ESD6000V; IP66
Boundary Dimensions	133(L)102(W)209(H)mm
Package Dimensions	160(L)160(W)215(H)mm
GrossWeight	0.83kg

* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.

Assembly diagram of Junction Box

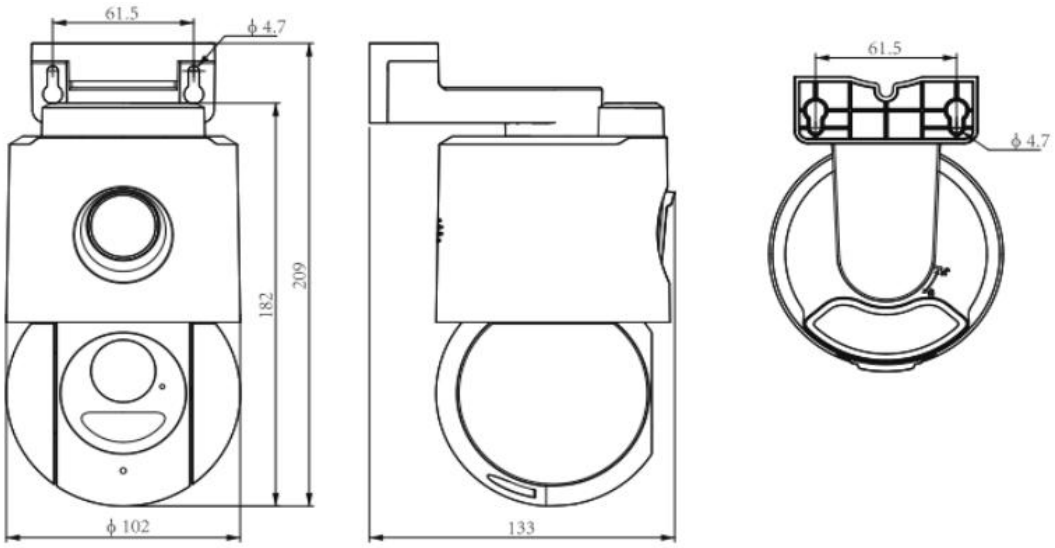

Softwares

Case Connect android

Case Connect iPhone

Case Station

Email: sales@canadasecurity.com
Website: canadasecurity.com
US : +1 301 900 1000
CA : +1 289 800 9000