


CSP-FT EX

# Explosion Proof Flexible Tube

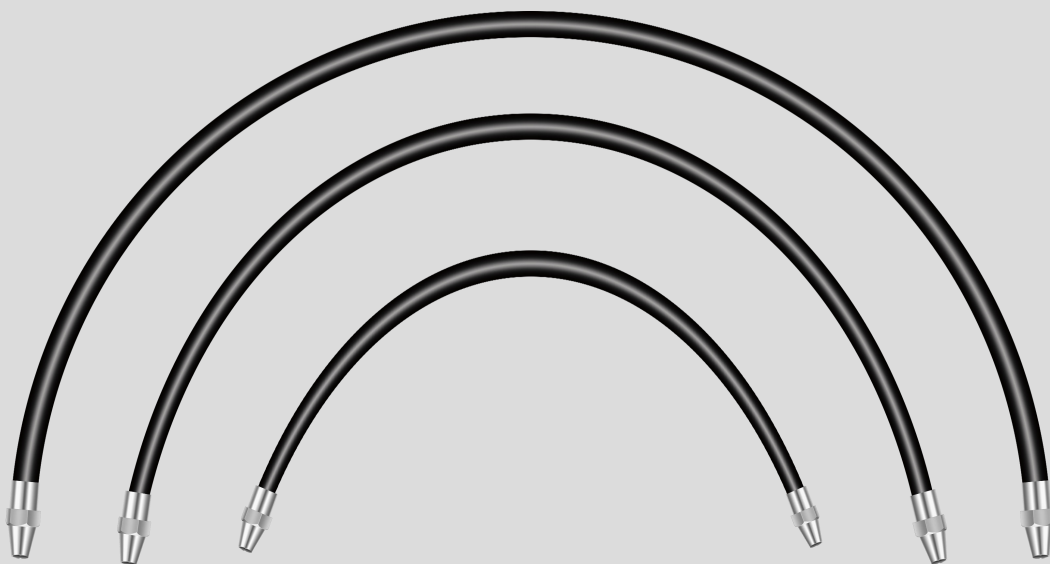

## KEY FEATURES

Explosion-proof flexible tube for cable threading in hazardous areas.

- Ex e IIC Gb
- IP66/68 (2m/2h)



Email: [sales@canadasecurity.com](mailto:sales@canadasecurity.com)  
Website: [canadasecurity.com](http://canadasecurity.com)

US : +1 301 900 1000  
CA : +1 289 800 9000

## SPECIFICATIONS

### Certificate

|                       |                                                                                                                                                                                                                                |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ATEX Certificate Mark | <b>CE</b> 2460  II 2 G Ex eb IIC Gb<br> II 2 D Ex tb IIIC Db |
| Standards             | IEC/EN60079                                                                                                                                                                                                                    |

### General

|                     |                                             |
|---------------------|---------------------------------------------|
| Connector Material  | Carbon Steel or Stainless steel 304 or 316L |
| Connector size      | G (NPT) , M                                 |
| IP                  | IP66/68 ( 2m/2h )                           |
| Ambient temperature | -40 to +80                                  |
| Air pressure        | 80Kpa to 106Kpa                             |
| Relative Humidity   | ≤95% (no condensation)                      |
| Length              | 1m, 1.5m, 2m or customer required length    |

## DIMENSIONS (Unit: mm)

