


CSP-G EX

ATEX Explosion Proof Glands

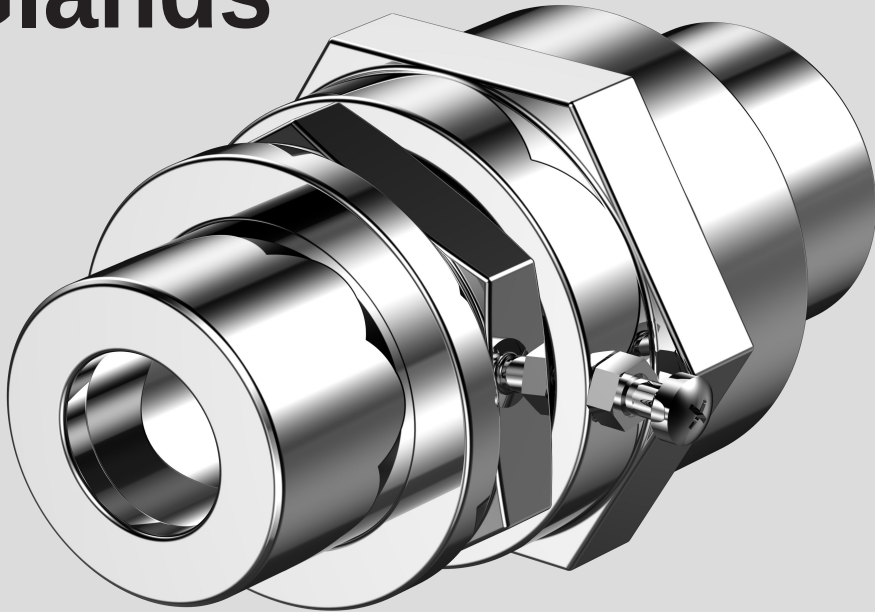

KEY FEATURES

Explosion proof cable gland

- II 2G Ex db II C Gb, II 2D Ex tb IIIC Db
- IP68



Email: sales@canadasecurity.com
Website: canadasecurity.com

US : +1 301 900 1000
CA : +1 289 800 9000

SPECIFICATIONS

Certificate	
Certificate Mark	CE 2460  II 2G Ex db II C Gb,  II 2D Ex tb IIIC Db
Certificate No	CNEX 17 ATEX 0011 U Issue 0, IECEx CNEX 17.0013U
Standards	EN60079-0:2012+A11:2013, EN60079-1:2014, EN60079-31:2014
Mechanical	
Material	Stainless steel 304 or 316L
IP	IP68
Model	CSP-G EX-M27×1.25, CSP-G EX-M25×1.5, CSP-G EX-M32×1.25
Joint	M32×1.25 — G3/4 M27×1.25 — G3/4 M25×1.5 — G3/4
Ambient	
Ambient temperature	-45 to +100°C
Air pressure	80Kpa to 110Kpa
Relative Humidity	≤95% (no condensation), (+25°C)

Connection way:

