



CSP-S12000H9GWH Mobile Monitoring Trailer



Project Series




Email: sales@canadasecurity.com
Website: canadasecurity.com

US : +1 301 900 1000
CA : +1 289 800 9000

SPECIFICATIONS

Solar	
Solar Panel	2*600W, Bifacial
Panel Rotating	180° Manual
Panel Tilting	30°-60° Electrical
MPPT Controller	45A-V With Remote Battery Monitoring
Estimated Solar Charging Time	10 hours
Battery	
Battery Type	GEL
Battery Capacity	12000WH
Battery AC Charger	1.5kW, AC110V/230V
System Voltage	DC 24V
Available Voltage	DC 24V, 48V
DC-to-AC Inverter	450W Rated
Battery Backup Time	72 Hours Under 133W Load
Telescopic Mast	
Mast & Height	8.5M
Lifting Winch	Electrical
Material	Hot-dip Galvanized Steel
Feature	Build in Wiring
CCTV	
CCTV BOX	350° Rotatable, 6-sided, back-opened
Strobe Light	Blue&White
Included Accessories	8-Port POE Switch
Optional accessories	Cameras, NVR, 4G Router, Loud Speaker
General	
Working Temp	-20°C-55°C
Extended Dimensions	4037*3246*9350mm
Retracted Dimensions	4037*1630*3100mm
Gross Weight	1100KG
QTY in 20' /40'	8 units / 14 units

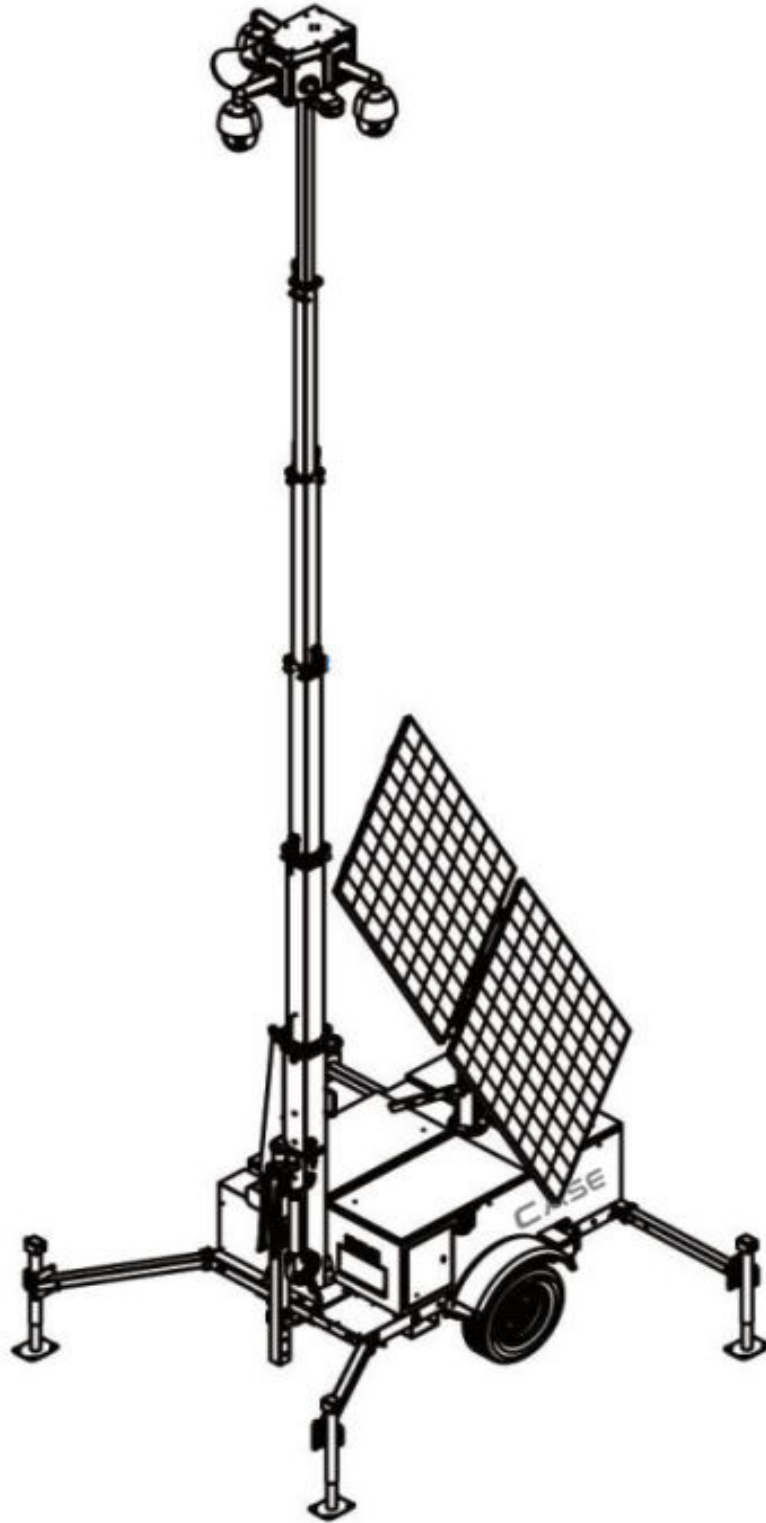

*Cameras are optional



Email: sales@canadasecurity.com
Website: canadasecurity.com

US : +1 301 900 1000
CA : +1 289 800 9000