



CSP-S6000H7GW Mobile Monitoring Trailer

Project Series




Email: sales@canadasecurity.com
Website: canadasecurity.com

US : +1 301 900 1000
CA : +1 289 800 9000

SPECIFICATIONS

Solar	
Solar Panel	1x720W, Bifacial
Panel Rotating	0°-60° Manual
Panel Tilting	30°-60° Manual
MPPT Controller	30A-E
Estimated Solar Charging Time	7 hours
Battery	
Battery Type	GEL
Battery Capacity	6000WH
Battery AC Charger	1.5kW, AC110V/230V
System Voltage	DC24V
Available Voltage	DC 24V, 48V
DC-to-AC Inverter	NO
Battery Backup Time	72 Hours Under 66W Load
Telescopic Mast	
Mast & Height	6.5M
Lifting Winch	Manual
Material	Hot-dip Galvanized Steel
Feature	Build in Wiring
CCTV	
CCTV BOX	350° Rotatable, 6-sided, back-opened
Strobe Light	Blue&White
Optional accessories	Cameras, NVR, 4G Router, Loud Speaker
General	
Working Temp	-20°C~55°C
Extended Dimensions	2384*1 800*7000mm
Retracted Dimensions	2384*1 800*3000mm
Gross Weight	900KG
QTY in 20' /40'	8 units / 16 units

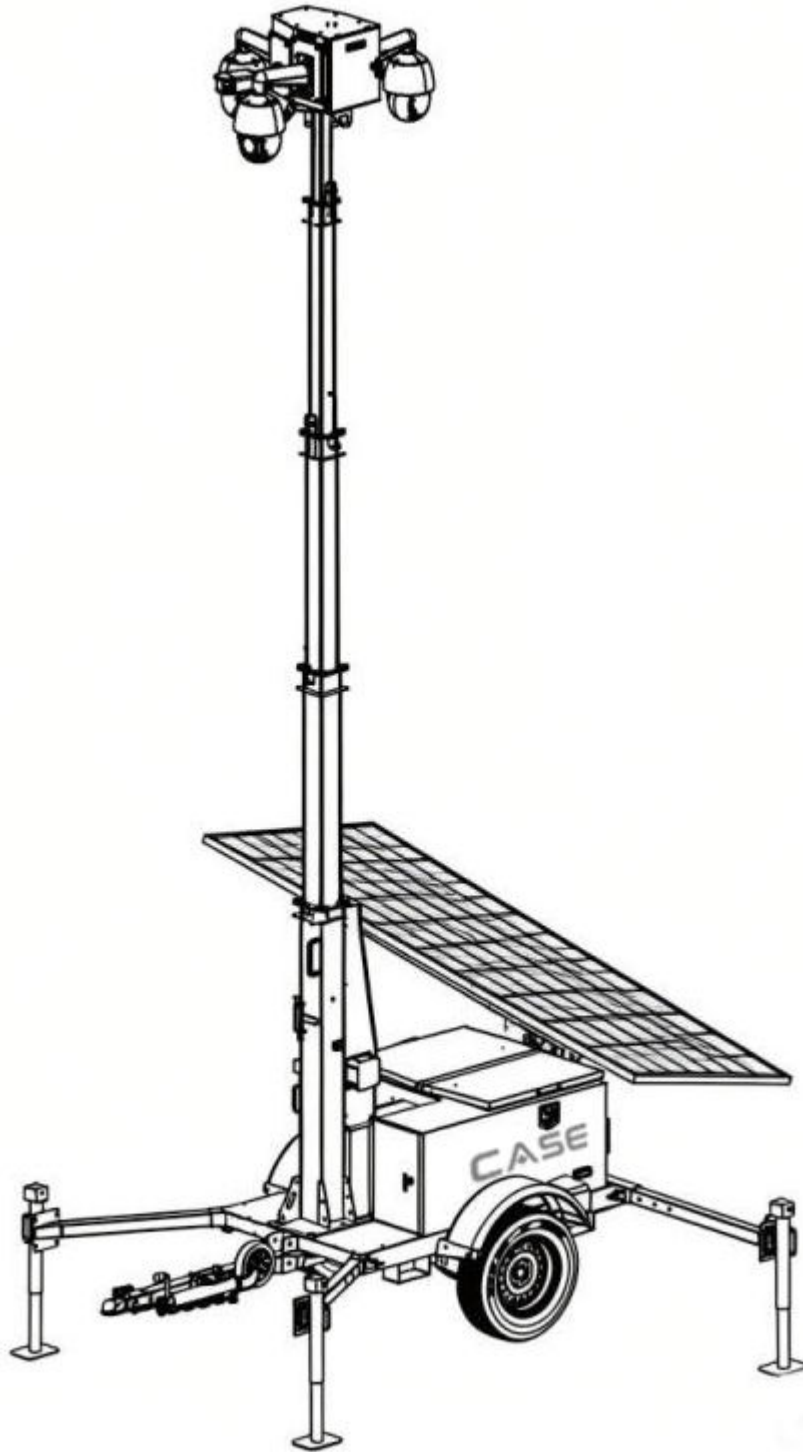

*Cameras are optional



Email: sales@canadasecurity.com
Website: canadasecurity.com

US : +1 301 900 1000
CA : +1 289 800 9000