

Tiandy



TC-C32MS Spec: I3/A/E/2.8-12mm

2MP Starlight Motorized Vandalproof IR Dome Camera (2.8-12mm)



Pro Series

KEY FEATURES

- Motorized Lens 2.8-12mm
- Up to 1920x1080@30fps
- S+265/H.265/H.264/M-JPEG
- Min. illumination Color: 0.001Lux@F1.4
- Smart IR, IR Range: 30m
- Support Video Analytics
- Support Human/Vehicle Classification
- Plugin Free
- Operating Conditions -35°~65°, 0~95% RH
- POE, IP66, IK10



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com
Website: en.tiandy.com

Tel: +86-22-58596065
Fax: +86-22-58596048



SPECIFICATIONS

| Camera | |
|----------------------|--|
| Image Sensor | 1/2.8" CMOS |
| Signal System | PAL/NTSC |
| Min. Illumination | Color: 0.001Lux@ (F1.4, ACG ON), B/W: 0Lux with IR |
| Shutter Time | 1s to 1/100,000s |
| Day & Night | Dual IR Cut Filter with Auto Switch |
| Wide Dynamic Range | 120dB |
| Angle Adjustment | pan 0~330°, tilt 0~75°, roate 0~350° |
| Lens | |
| Lens Type | Motorized |
| Focus | 2.8-12mm |
| Lens Mount | Φ14 |
| Aperture | F1.4~F2.8, Motorized |
| FOV | Horizontal field of view: 83°~33.7° |
| Illuminator | |
| IR LEDs | 18 |
| IR Range | Up to 30m |
| Wavelength | 850nm |
| White LEDs | N/A |
| Compression Standard | |
| Video Compression | S+265/H.265/H.264/M-JPEG |
| Video Bit Rate | 32Kbps~6Mbps |
| Audio Compression | G.711/G.711U/ADPCM |
| Audio Bit Rate | 8K~48Kbps |
| Image | |
| Max. Resolution | 1920x1080 |
| Main Stream | PAL: 25fps (1920×1080, 1280×960, 1280×720, 704×576, 640×480) NTSC: 30fps (1920×1080, 1280×960, 1280×720, 704×480, 640×480) |
| Sub Stream | PAL: 25fps (704×576, 704×288, 640×360, 352×288) NTSC: 30fps (704×480, 704×240, 640×360, 352×240) |
| Third Stream | N/A |
| Image Setting | Saturation, brightness, contrast, sharpness, adjustable by client software or web browser |
| Image Enhancement | BLC/3D DNR/HLC |
| ROI | N/A |
| OSD | 16×16, 32×32, 48×48, adaptable size, Letters Such as Week, Date, Time, Total 1 Regions |
| Picture Overlay | Yes |
| Privace Mask | Yes |
| Smart Defog | Yes |
| Feature | |
| Alarm Trigger | Event Input, Event Output, Motion Detection, Mask Alarm, IP Address Conflict, MAC Address Conflict |
| Video Analytics | Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Video Abnormal, Audio Abnormal |



| | |
|--------------------------------|--|
| Early Warning(EW) | N/A |
| Intelligent Coding | Yes |
| Intelligent Image | Yes |
| Intelligent Alarm | Yes |
| Network | |
| ANR | Yes, auto store video in SD card when NVR disconnected, and upload video to NVR when resumed connection (Only Support Tiandy ANR NVR) |
| Protocols | TCP/IP, ICMP, HTTP, HTTPS, DHCP, DNS, DDNS, MULTICAST, UPnP, FTP, IPV4, NTP, RTSP, SMTP, IGMP, 802.1x, QoS, Multicast |
| System Compatibility | ONVIF (PROFILE S/T), SDK, CGI, P2P |
| Remote Connection | ≤7 |
| Client | Easy7, EasyLive |
| Web Version | Web6 |
| Interface | |
| Communication Interface | 1 RJ45 10M/ 100M self adaptive Ethernet port |
| Audio | 1/1, Mic in |
| Alarm | 2/1 |
| Reset Button | Yes |
| On-board storage | Built-in MicroSD card slot, up to 256 GB |
| General | |
| Firmware Version | - |
| Web Client Language | 15 languages English, Russian, Spanish, Korean, Italian, Turkish, Simple Chinese, Traditional Chinese, Thai, French, Polish, Dutch, Hebraism, Farsi, Arabic |
| Operating Conditions | -35°C ~ 65°C, 0 ~ 95% RH |
| Power Supply | DC12V±20%/PoE |
| Power Consumption | MAX: 7.5W(12V) MAX: 9W(POE) |
| Protection | IP66, IK10 |
| Heater | N/A |
| Dimensions | Φ143×124 mm (Φ5.63*4.88 inch) |
| Weight | 0.95Kg (2.09lb) |


* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.

AVAILABLE MODEL

TC-C32MS SPEC: I3/A/E/2.8-12MM

Tiandy

DIMENSIONS (Unit: mm)

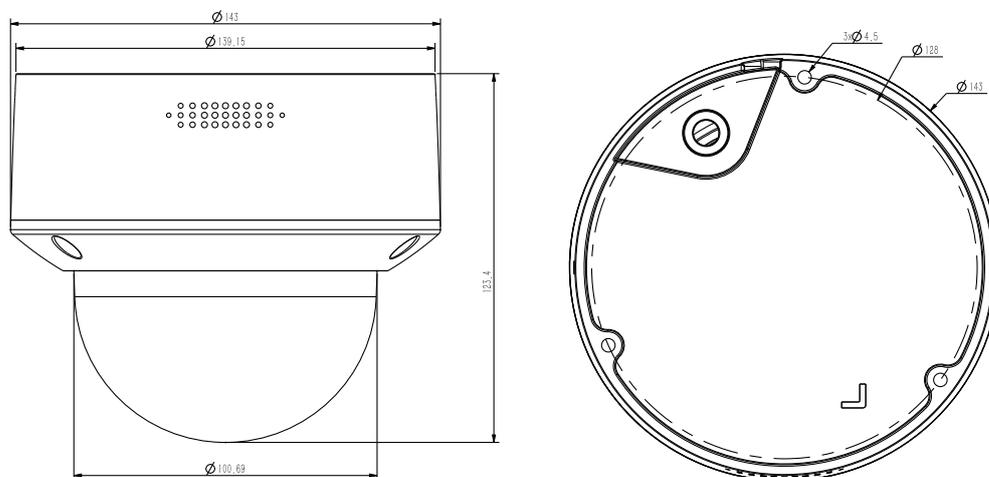

ACCESSORIES



A28
Wall Mount



TC-P54BM Spec: V3
Junction Box

DISTRIBUTED BY



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com
Website: en.tiandy.com

Tel: +86-22-58596065
Fax: +86-22-58596048