

Tiandy



TC-C32TP Spec: I5/E/2.8-12mm/TH

2MP Super Starlight Motorized IR Bullet Camera (2.8-12mm)

Pro Series



KEY FEATURES

- Motorized Lens 2.8-12mm
- Up to 1920x1080@30fps
- S+265/H.265/H.264/M-JPEG
- Min. illumination Color: 0.0004Lux@F1.2
- Smart IR, IR Range: 50m
- Support Video Analytics
- Plugin Free
- Operating Conditions -35°~65°, 0~95% RH
- POE, IP67



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com Tel: +86-22-58596065
Website: en.tiandy.com Fax: +86-22-58596048



SPECIFICATIONS

| Camera | |
|----------------------|---|
| Image Sensor | 1/2.8" CMOS |
| Signal System | PAL/NTSC |
| Min. Illumination | Color: 0.0004Lux@ (F1.2, ACG ON), B/W: 0Lux with IR |
| Shutter Time | 1s to 1/100,000s |
| Day & Night | Dual IR Cut Filter with Auto Switch |
| Wide Dynamic Range | 120dB |
| Angle Adjustment | Bracket, pan 0~360°, tilt 0~75°, roate 0~360° |
| Lens | |
| Lens Type | Motorized |
| Focus | 2.8-12mm |
| Lens Mount | Φ14 |
| Aperture | F1.2~F2.2, Motorized |
| FOV | Horizontal field of view: 110.2° ~ 37.5° |
| Illuminator | |
| IR LEDs | 4 |
| IR Range | Up to 50m |
| Wavelength | 850nm |
| White LEDs | N/A |
| Compression Standard | |
| Video Compression | S+265/H.265/H.264/M-JPEG |
| Video Bit Rate | 32Kbps~16Mbps |
| Audio Compression | G.711A/G.711U/ADPCM_D/AAC_LC |
| Audio Bit Rate | 8K~48Kbps |
| Image | |
| Max. Resolution | 1920x1080 |
| Main Stream | PAL: 25fps (1920×1080, 1280×960, 1280×720, 704×576, 640×480) |
| | NTSC: 30fps (1920×1080, 1280×960, 1280×720, 704×480, 640×480) |
| Sub Stream | PAL: 25fps (704×576, 704×288, 640×360, 352×288) |
| | NTSC: 30fps (704×480, 704×240, 640×360, 352×240) |
| Third Stream | 4CIF |
| Image Setting | Saturation, brightness, contrast, sharpness, adjustable by client software or web browser |
| Image Enhancement | BLC/3D DNR/HLC/Corridor Format |
| ROI | Support 7 fixed region of coding |
| OSD | 16×16, 24×24,32×32, 48×48, 64×64, 96×96, adaptable size, Letters Such as Week, Date, Time, Total 5 Regions |
| Picture Overlay | Yes |
| Privace Mask | Yes |
| Smart Defog | Yes |
| Feature | |
| Alarm Trigger | Event Input, Event Output, Motion Detection, Mask Alarm, Disk Full, Disk R/W Error, IP Address Conflict, MAC Address Conflict, FTP Server Exception |






| | |
|--------------------------------|--|
| Video Analytics | Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Crowded, Video Abnormal, Audio Abnormal |
| Early Warning(EW) | N/A |
| Intelligent Coding | N/A |
| Intelligent Image | N/A |
| Intelligent Alarm | N/A |
| Network | |
| ANR | Yes, auto store video in SD card when NVR disconnected, and upload video to NVR when resumed connection (Only Support Tiandy ANR NVR) |
| Protocols | TCP/IP, ICMP, HTTP, HTTPS, DHCP, DNS, DDNS, MULTICAST, UPnP, FTP, IPV4, NTP, RTSP, SMTP, SNMP, IGMP, IEEE802.1X, QoS, IPV6 |
| System Compatibility | ONVIF (PROFILE S/T), SDK, CGI, P2P |
| Remote Connection | ≤7 |
| Client | Easy7, EasyLive |
| Web Version | Web6 |
| Interface | |
| Communication Interface | 1 RJ45 10M/ 100M self adaptive Ethernet port |
| Audio | 1/1 |
| Alarm | 2/1 |
| Reset Button | Yes |
| On-board storage | Built-in MicroSD card slot, up to 128 GB |
| General | |
| Firmware Version | - |
| Web Client Language | 15 languages English, Russian, Spanish, Korean, Italian, Turkish, Simple Chinese, Traditional Chinese, Thai, French, Polish, Dutch, Hebraism, Farsi, Arabic |
| Operating Conditions | -35°C ~ 65°C, 0 ~ 95% RH |
| Power Supply | DC12V±20%/PoE |
| Power Consumption | MAX: 9W (12V) MAX: 10W (POE) |
| Protection | IP67 |
| Heater | N/A |
| Dimensions | 330×114×107mm (12.99×4.49×4.21 inch) |
| Weight | 1.5kg (3.31lb) |

* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.

AVAILABLE MODEL

TC-C32TP SPEC: I5/E/2.8-12MM/TH

DIMENSIONS (Unit: mm)

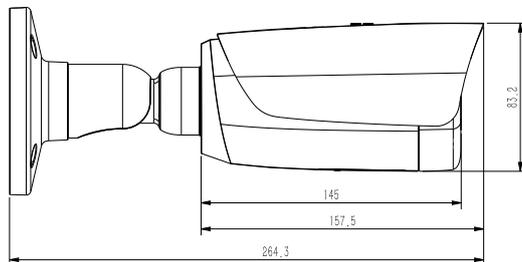

ACCESSORIES



A36
Pole Mount



A35
Corner Mount



TC-P54AM Spec: V4
Junction Box



A22
Junction Box

DISTRIBUTED BY



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com

Tel: +86-22-58596065

Website: en.tiandy.com

Fax: +86-22-58596048